

FLORIDA SOLAR ENERGY CENTER[•] Creating Energy Independence

Cost Effectiveness of Energy Efficiency and On-site Photovoltaic Power for 2015 International Energy Conservation Code ERI (Energy Rating Index) Compliance

FSEC-CR-2056-17

Final Report February 21, 2017

Submitted to

Natural Resources Defense Council 40 West 20th Street, New York, New York 10011

Authors

Philip Fairey Florida Solar Energy Center

Copyright © 2013 Florida Solar Energy Center/University of Central Florida All rights reserved.

> 1679 Clearlake Road Cocoa, Florida 32922, USA (321) 638-1000

www.floridaenergycenter.org



A Research Institute of the University of Central Florida

Cost Effectiveness of Energy Efficiency and On-site Photovoltaic Power for 2015 International Energy Conservation Code ERI (Energy Rating Index) Compliance

Philip Fairey Florida Solar Energy Center

February 21, 2017

Background

The Natural Resources Defense Council (NRDC) contracted the Florida Solar Energy Center (FSEC) to conduct cost effectiveness analysis of new homes configured to comply with the Energy Rating Index (ERI) compliance provisions of Section R406 of the 2015 International Energy Conservation Code (IECC). Simulation analysis of homes configured to comply with the minimum envelope efficiency provisions and mandatory requirements of Section R406.2 of the 2015 IECC were used as the baseline for the analysis. These homes are compared against homes meeting the minimum prescriptive compliance requirements of Section R402 of the 2015 IECC and homes meeting the ERI thresholds of Section R406 of the 2015 IECC across representative U.S. climates. EnergyGauge[®] USA v.5.1, a RESNET-accredited HERS software tool, is used to conduct the simulation analysis.

This study builds on previous simulation and cost effectiveness analysis work used in the development of the ERI compliance values that were adopted by the 2015 IECC (Fairey 2013). This study extends the earlier work to include cost effectiveness analysis of homes using only energy efficiency to meet the ERI requirements, homes using only on-site photovoltaic power to meet the ERI requirements and homes using a combination of energy efficiency and on-site photovoltaic power to meet the ERI requirements.

Abstract

EnergyGauge® USA v.5.1 is used to simulate the energy use of one-story, threebedroom, 2000 ft², single-family, frame homes in sixteen representative U.S. climates comprising all eight IECC climate zones. The energy use of the Section R406.2 minimum efficiency home (the Baseline Home) is compared against the energy use of homes complying with the prescriptive requirements of Section R402 of the 2015 IECC and against homes complying with the Section R406 Energy Rating Index (ERI) Compliance Alternative. The improvement cost and energy savings of the improved homes relative to the Baseline Home are then used to determine the cost effectiveness of the home improvements.

The Baseline Home is compared against four improved home scenarios, as follows.

- 1. 2015 IECC prescriptive compliance case
- 2. Baseline Home + PV case
- 3. 2015 IECC prescriptive compliance + PV case
- 4. Energy efficiency only case

Results from the analysis are useful in comparing the cost effectiveness of achieving compliance with Section R406 of the 2015 IECC using the Energy Rating Index (ERI) and particularly for comparing the cost effectiveness of on-site photovoltaic power generation with the cost effectiveness of improved home efficiency measures.

Methodology

One-story, 2000 ft², 3-bedroom, frame homes are configured to represent the minimum envelope efficiencies and mandatory requirements specified by Section R406.2 of the 2015 IECC. These home configurations represent the baseline against which other home configurations are compared for improvement costs and energy cost savings in eleven representative TMY3 locations across six IECC climate regions of the United States. Best case window orientation is simulated such that 35% of the total window area is located on the front (north) and rear (south) faces of the home and 15% is located on the east and west faces. The front of the homes also have a 20-foot adjoining garage wall. The foundation for the homes is varied by IECC climate zone with slab-on-grade foundations in zones 1 - 2, vented crawlspaces in zones 3 - 4, and unconditioned basements in zones 5 - 8.

Baseline Homes

Tables 1 through 5 present the characteristics for the Baseline Home configurations used in the simulation analysis. This baseline represents the Section R406 efficiency "backstops" of the 2015 IECC Energy Rating Index Compliance Alternative. Envelope characteristics are limited to the provisions of the 2009 IECC with "mandatory" requirements of the 2015 IECC included. Thus, the Baseline Home represent the *maximum ERI* allowed under the energy efficiency provisions of the 2015 IECC.

Component	Units
Conditioned floor area (ft ²)	2,000
Conditioned volume (ft ³)	18,000
N-S wall length (ft)	50
E-W wall length (ft)	40
1 st floor wall height (ft)	9
Door area (ft ²)	40
Window/floor area ratio (%)	15%
Total window area (ft ²)	300
N-S window fraction (%)	35%
E-W window fraction (%)	15%

Table 1: General Home	Characteristics
-----------------------	-----------------

LOCATION	IECC CZ	Ceiling R-value	Wall R-value	Found. Type	Slab R-value	Floor R-value	Fen U-factor	Fen SHGC
Miami, FL	1A	30	13	SOG	none	n/a	1.20	0.30
Houston, TX	2A	30	13	SOG	none	n/a	0.65	0.30
Orlando, FL	2A	30	13	SOG	none	n/a	0.65	0.30
Phoenix, AZ	2B	30	13	SOG	none	n/a	0.65	0.30
Charleston, SC	3A	30	13	Crawl	n/a	19	0.50	0.30
Charlotte, NC	3A	30	13	Crawl	n/a	19	0.50	0.30
Oklahoma City, OK	3A	30	13	Crawl	n/a	19	0.50	0.30
Las Vegas, NV	3B	30	13	Crawl	n/a	19	0.50	0.30

Table 2: Baseline Component Insulation Values

LOCATION	IECC CZ	Ceiling R-value	Wall R-value	Found. Type	Slab R-value	Floor R-value	Fen U-factor	Fen SHGC
Baltimore, MD	4A	38	13	Crawl	n/a	19	0.35	0.40
Kansas City, MO	4A	38	13	Crawl	n/a	19	0.35	0.40
Chicago, IL	5A	38	13+5	ucBsmt	n/a	30	0.35	0.40
Denver, CO	5B	38	13+5	ucBsmt	n/a	30	0.35	0.40
Minneapolis, MN	6A	49	13+5	ucBsmt	n/a	30	0.35	0.40
Billings, MT	6B	49	13+5	ucBsmt	n/a	30	0.35	0.40
Fargo, ND	7A	49	21	ucBsmt	n/a	30	0.35	0.40
Fairbanks, AK	8	49	21	ucBsmt	n/a	30	0.35	0.40

Notes for Tables 2:

Wall R-value: 1st value is cavity fill and 2nd value is continuous insulation

SOG = slab on grade

Crawl = crawlspace

ucBsmt = unconditioned basement

Table 5. Additional Daschile Hollik	c Characteristics
Item	Value
Envelope Leakage	7 ach50
Air Distribution System Efficiency	See Table 4
Programmable Thermostat	Yes
High Efficiency Lighting	75%
Hot Water Pipe Insulation (R-3)	Yes
Mechanical Ventilation (per ASHRAE 62.2-2013)	See Table 9
Sealed Air Handlers	No

Table 4: Baseline Home Air Distribution Systems (ADS)

Foundation Type	ADS location	Duct R-value	Duct leakage
Slab on grade	Attic/garage AHU	8	8 cfm25/100 ft ²
Crawlspace	Crawlspace	6	8 cfm25/100 ft ²
Basement	Basement	6	$8 \text{ cfm}25/100 \text{ ft}^2$

Base heating and cooling thermostat set point temperatures for all simulations were maintained at 78 °F for cooling and 68 °F for heating with programmable thermostat setup/setback of 2 °F for 6 hours per day in accordance with ANSI/RESNET/ICC Standard 301-2014.

Table 5: Baseline Home Equipment

LOCATION	IECC	Heating	System	Coolin	g System	Water He	eater
LOCATION	CZ	Fuel	Eff	Fuel	SEER	Fuel	EF
Miami, FL	1A	elec	8.2	elec	14	elec (40)	0.95
Houston, TX	2A	elec	8.2	elec	14	elec (40)	0.95
Orlando, FL	2A	elec	8.2	elec	14	elec (40)	0.95
Phoenix, AZ	2B	elec	8.2	elec	14	elec (40)	0.95
Charleston, SC	3A	elec	8.2	elec	14	elec (40)	0.95
Charlotte, NC	3A	elec	8.2	elec	14	elec (40)	0.95
Oklahoma City, OK	3A	elec	8.2	elec	14	elec (40)	0.95
Las Vegas, NV	3B	gas	80%	elec	14	gas (40)	0.62
Baltimore, MD	4A	gas	80%	elec	14	gas (40)	0.62
Kansas City, MO	4A	gas	80%	elec	14	gas (40)	0.62
Chicago, IL	5A	gas	80%	elec	13	gas (40)	0.62

LOCATION	IECC	Heating	System	Coolin	g System	Water He	eater
LOCATION	CZ	Fuel	Eff	Fuel	SEER	Fuel	EF
Denver, CO	5B	gas	80%	elec	13	gas (40)	0.62
Minneapolis, MN	6A	gas	80%	elec	13	gas (40)	0.62
Billings, MT	6B	gas	80%	elec	13	gas (40)	0.62
Fargo, ND	7A	gas	80%	elec	13	gas (40)	0.62
Fairbanks, AK	8	gas	80%	elec	13	gas (40)	0.62

Notes for Tables 5 and 7:

Eff = heating system efficiency where gas-fired furnace is given as AFUE (%) and electric heat pump is given as HSPF

The Baseline Home equipment shown in Table 5 is minimally compliant with the 2015 federal standards (U.S. Department of Energy, 10 CFR Part 430) for heating, cooling and water heating equipment.

Improved Homes

In addition to the baseline homes, four additional home configuration scenarios are simulated as follows:

- 1. 2015 IECC prescriptive compliance case
- 2. Baseline + PV case
- 3. 2015 IECC prescriptive compliance + PV case
- 4. Energy efficiency only case

<u>Scenario 1</u> is configured to be minimally compliant with the prescriptive requirements of Section 402 of the 2015 IECC. The configurations for these homes are given in Table 6 through Table 8. The values in *bold italic* font represent changes from the Baseline Home configurations.

LOCATION	IECC CZ	Ceiling R-value	Wall R-value	Found. Type	Slab R-value	Floor R-value	Fen U-factor	Fen SHGC
Miami, FL	1A	30	13	SOG	none	n/a	0.50	0.25
Houston, TX	2A	38	13	SOG	none	n/a	0.40	0.25
Orlando, FL	2A	38	13	SOG	none	n/a	0.40	0.25
Phoenix, AZ	2B	38	13	SOG	none	n/a	0.40	0.25
Charleston, SC	3A	38	20	Crawl	n/a	19	0.35	0.25
Charlotte, NC	3A	38	20	Crawl	n/a	19	0.35	0.25
Oklahoma City, OK	3A	38	20	Crawl	n/a	19	0.35	0.25
Las Vegas, NV	3B	38	20	Crawl	n/a	19	0.35	0.25
Baltimore, MD	4A	49	20	Crawl	n/a	19	0.35	0.40
Kansas City, MO	4A	49	20	Crawl	n/a	19	0.35	0.40
Chicago, IL	5A	49	13+5	ucBsmt	n/a	30	0.32	0.40
Denver, CO	5B	49	13+5	ucBsmt	n/a	30	0.32	0.40
Minneapolis, MN	6A	49	20 +5	ucBsmt	n/a	30	0.32	0.40
Billings, MT	6B	49	20 +5	ucBsmt	n/a	30	0.32	0.40
Fargo, ND	7A	49	20+5	ucBsmt	n/a	38	0.32	0.40
Fairbanks, AK	8	49	20+5	ucBsmt	n/a	38	0.32	0.40

 Table 6: 2015 IECC Prescriptive Insulation Values used for Scenario 1

Notes for Tables 6:

Wall R-value: 1st value is cavity fill and 2nd value is continuous insulation

SOG = slab on grade

Crawl = crawlspace

LOCATION	IECC	Ceiling	Wall	Found.	Slab		Fen	
LUCATION	CZ	R-value	R-value	Туре	R-value	R-value	U-factor	SHGC

ucBsmt = unconditioned basement

Table 7: Additional 2015 IECC Home Characteristics
--

Item	Value
Envelope Leakage	CZ 1-2: 5 ach50 CZ 3-8: 3 ach50
Air Distribution System Efficiency	See Table 8
Programmable Thermostat	Yes
Hot Water Pipe Insulation (R-3)	Yes
Mechanical Ventilation (per ASHRAE 62.2-2013)	See Table 9
Sealed Air Handlers	Yes

Foundation Type	ADS location	Duct R-value	Duct leakage
Slab on grade	Attic/garage AHU	8	$4 \text{ cfm} 25/100 \text{ ft}^2$
Crawlspace	Crawlspace	6	$4 \text{ cfm} 25/100 \text{ ft}^2$
Basement	Basement	6	$4 \text{ cfm} 25/100 \text{ ft}^2$

The heating, cooling and hot water equipment in the 2015 IECC Homes is the same as the equipment in the Baseline Homes (see Table 5.)

Mechanical ventilation in both the Baseline Homes and the Improved Homes (IECC 2015 or better) is variable by climate location. Table 9 provides the ASHRAE 62.2-2013 weather and shielding factors (wsf) for each location and the resultant mechanical ventilation rates (cfm) used in the simulations for this study.

IECC 62.2-2013 Mech vent rate (cfm)									
Location	IECC 62.2-2013		, , , , , , , , , , , , , , , , , , ,						
Location	Zone	wsf	Baseline	IECC 2015					
Miami, FL	1A	0.41	43	57					
Houston, TX	2A	0.42	42	56					
Orlando, FL	2A	0.39	42	56					
Phoenix, AZ	2B	0.43	41	55					
Charleston, SC	3A	0.43	41	69					
Charlotte, NC	3A	0.43	41	69					
Oklahoma City, OK	3A	0.56	30	63					
Las Vegas, NV	3B	0.55	30	63					
Baltimore, MD	4A	0.50	33	66					
Kansas City, MO	4A	0.60	30	61					
Chicago, IL	5A	0.60	30	61					
Denver, CO	5B	0.59	30	61					
Minneapolis, MN	6A	0.63	30	62					
Billings, MT	6B	0.66	30	58					
Fargo, ND	7A	0.69	30	56					
Fairbanks, AK	8	0.70	30	56					

Table 9: Mechanical Ventilation Rates by Location

<u>Scenario 2</u> comprises the Baseline Home plus sufficient on-site photovoltaic power to achieve compliance with the ERI score requirements of Table R406.4 of the 2015 IECC.

The ERI scores for both the Baseline Home and for 2015 IECC compliance are given in Table 10, showing the ERI point difference that must be compensated by on-site photovoltaic power to achieve 2015 IECC ERI compliance.

Climate Zone	Baseline	Compliance
	ERI	ERI
Zone 1	75	52
Zone 2	76	52
Zone 3	76	51
Zone 4	84	54
Zone 5	86	55
Zone 6	86	54
Zone 7	87	53
Zone 8	87	53

Table 10: 2015 IECC Criteria

<u>Scenario 3</u> is similar to Scenario 2 except it comprises the 2015 IECC prescriptive compliance Home plus sufficient on-site photovoltaic power to achieve compliance with the ERI compliance score requirements.

<u>Scenario 4</u> comprises only energy efficiency options to achieve the ERI compliance score requirements. The most common efficiency improvements employed in Scenario 4 are 100% high-efficiency lighting; higher efficiency heating, cooling and water heating equipment; interior, leak-free air distribution systems; enhanced envelope efficiencies; and energy star refrigerators, dishwashers and clothes washers.

Appendix A provides the full economic analysis for each of these four scenarios along with a complete listing of the specific home improvements for each scenario and climate location.

Improvement Costs

Incremental improvement costs are determined using the methodology used by Fairey and Parker (2012). In most cases, improvement costs used in the investigation parallel those available from the National Renewable Energy Laboratory's (NREL) National Residential Efficiency Measure Database¹ and from the NAHB (2009) economic database.

For heating and air conditioning equipment costs, Fairey and Parker (2012) relied on a separate methodology whereby the costs are expressed as a function of the equipment capacity and efficiency along with an offset, derived using available retail data and estimated fixed costs. The data and analysis that underlie the heating and cooling equipment cost equations are presented in Appendix B. For certain other costs, the NREL cost data were reduced to equations based on component areas and incremental improvement changes. For example, examination of the NREL data on blown cellulose insulation reveals that the cost is approximately \$0.034/ft² per R-value. For these types of

¹ www.nrel.gov/ap/retrofits/index.cfm

improvements these costs are cast in such terms. For most other costs, the costs contained in the NREL database are adopted.

For ENERGY STAR appliance costs, representative pricing from the internet is used to determine incremental costs. However, this is difficult because most new appliances are now ENERGY STAR compliant and it is often difficult to find appliances with similar features that are not rated as ENERGY STAR.

Attic radiant barrier systems (RBS) are employed to enhance efficiency in a number of cooling dominated and mixed climate homes. The cost of the RBS is determined as \$0.25 per square foot of roof area. For each of the improved homes, the forced air distribution systems is brought into the conditioned space and tested to be leak free. The cost of this improvement is taken as \$0.50 per square foot of conditioned floor area.

For HVAC equipment, the following equations are used to calculate installed costs (see Appendix B for derivations).

- Heat pumps: -5539 + 604*SEER + 699*tons
- Air conditioners (with strip heat): -1409 + 292*SEER + 520*tons
- Gas furnace/air conditioner: -6067 + 568*SEER + 517*tons + 4.04*kBtu + 1468*AFUE
- Gas furnace only: -3936 + 14.95*kBtu + 5865*AFUE where:

tons = air conditioning capacity, which is limited to a minimum value of 1.5 tons kBtu = gas furnace capacity, which is limited to a minimum value of 40 kBtu

The estimating equations are valid for heat pump and cooling system sizes of 1.5-5 tons. Similarly, the costs of gas heating equipment are based on heating capacities of 40-120 kBtu/h.

For envelope measures, incremental costs are determined as the difference between the measure cost for the Baseline Home component and the measure cost for the Improved Home component. For example, if the ceiling insulation level requirement in the Baseline Home is R-30 and it is increased to R-38 in the Improved Home, the incremental cost would be the R-value difference (8) times \$0.034 per square foot of ceiling area (for blown cellulose).

Wall R-value is increased in some Improved Homes. Wall R-value may be increased in two ways: 1) the sheathing insulation R-value may be increased and 2) the wall cavity insulation R-value may be increased. Where the sheathing insulation R-value is increased, it is increased from R-5 (base case) to R-10. The incremental cost for this increase is taken as the difference in cost between the R-5 XPS base case (\$1.30/ft²) and the R-10 XPS improved case (\$1.70/ft²), as given in the NREL cost database.² The cost for the R-5 XPS base case sheathing can also be cross checked by examining the NAHB (2009) economic database developed in support of 90.2 (ASHRAE 1481-RP). Matrix B.1 of this report provides the cost values shown in Table 11.

² <u>http://www.nrel.gov/ap/retrofits/measures.cfm?gId=12&ctId=410</u>

Construction	ft^2	Δ \$/ft ²	
2x4, 16" oc; R-13	\$5.72		base wall
add R-5 XPS	\$6.95	\$1.23	increase for sheathing on 2x4 walls
2x6, 24" oc; R21	\$6.58	\$0.86	increase for 2X6 studs + R-21
add R-5 XPS	\$7.69	\$1.97	increase for $2x6 + R-21 + R-5$ sheathing

Table 11: Construction cost for wood frame walls with fiberglass insulation

Table 11 data show the added cost for R-5 XPS sheathing to be $1.23/\text{ft}^2$ of wall, which is very similar to the NREL cost database value of $1.30/\text{ft}^2$. The ASHRAE 1481-RP report does not report construction costs for R-10 XPS so the values given in the NREL cost database are used for sheathing insulation improvements in the economic cost effectiveness analysis conducted here.

For wall cavity insulation, R-value may be increased from R-13 for 2x4 frame walls to R-20 for 2x6 frame walls. Table 11 shows that this increase in cavity wall R-value, including the change from 2x4 studs on 16" centers to 2x6 studs on 24" centers, has an incremental cost of $0.86/ft^2$. The wall construction costs shown in Table 8 are used for wall cavity insulation improvements for the economic cost effectiveness analysis conducted here.

Window thermal characteristics are also improved. Window improvement costs are given as a function of window U-factor by ASHRAE 1481-RP. Figure 1 of ASHRAE 1481-RP casts the incremental window cost above the cost of a standard, double pane window in terms of an exponential equation as a function of window U-factor, as follows:

Incremental Window Cost =
$$1851.9 * e^{(-19.29 * U)}$$
 Eq. 1

Equation 1 represents the incremental cost of improving the window U-Factor with respect to the cost of the standard, double pane window of the same frame type. Table 3 of ASHRAE 1481-RP provides 2009 construction costs for 5 standard, double pane, vinyl, frame windows with an average U-factor of 0.49 and an average cost of \$15.09. Escalating this cost from 2009 to 2015 at a general inflation rate of 2.5% yields an average 2015 cost of \$17.50. Thus, the total cost of vinyl frame windows in new construction can be represented by equation 2.

Window Cost =
$$17.50 + 1851.9 * e^{(-19.29 * U)}$$
 Eq. 2

Incremental window improvement costs as a function of U-factor can also be derived from data provided in the NREL cost database.³ Figure 1 shows the results from such an analysis of the incremental costs in the NREL cost database. While the resulting exponential equation has somewhat different coefficient values, the results are quite close and provide an additional level of confidence in the ASHRAE 1481-RP data in that they can be effectively confirmed using a second, independent data source. Figure 2 shows the similarity between the resulting equations along with the three window U-factors specified by the 2015 IECC, where climate zone 1 = 0.40, zones 2-4 = 0.35 and zones 5-8 = 0.32.

³ <u>http://www.nrel.gov/ap/retrofits/measures.cfm?gId=16&ctId=190</u>


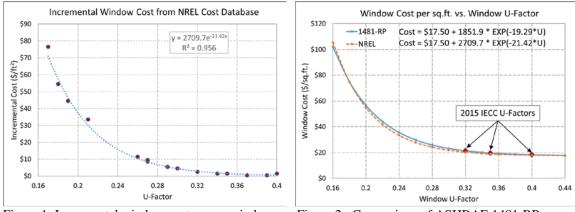


Figure 1: Incremental window cost versus window U-Factor derived from NREL cost database.



Equation 2 is used in this study to determine baseline and improved window costs where windows are improved.

Installed PV costs are taken at \$4.00/Wp (watts at peak solar). This cost is somewhat greater than the costs reported by the Solar Market Research Report for the 3rd quarter of 2014, which shows residential turnkey Rooftop PV system costs steadily declining from \$3.83/Wp during the 1st quarter of 2014 to \$3.60/Wp in the 3rd quarter of the year.⁴ A 30% income tax credit (ITC) is applied to the \$4.00/Wp cost of PV systems. Net metering is assumed for the PV systems. PV power production is subtracted from the total electricity energy use of the home to arrive at the net electricity use for the homes given in Appendix A and in the tables contained in the findings of the study.

Economic Analysis

Economic analysis is based on a 30-year, present value, life-cycle-cost analysis using the methodology specified by Section 4.6, ANSI/RESNET 301-2014, which is based on the P1, P2 method of determining present worth values by Duffie and Beckman (1980). The equations used to determine P1 and P2 are given in Appendix C. The economic parameter values published on the RESNET web site for 2014⁵ are used in the analysis. These economic parameter values are given in Table 12.

	v alues
General Inflation Rate (GR)	2.53%
Discount Rate (DR)	4.53%
Mortgage Interest Rate (MR)	5.42%
Down payment Rate (DnPmt)	10.00%
Energy Inflation Rate (ER)	4.18%

Table 12: Economic Parameter Values

The life-cycle-cost analysis includes replacement costs (escalated at the general inflation rate) for measures lasting less than the full analysis period (standard residential mortgage period of 30 years in this case). For example, HVAC equipment, with an assumed service life of 15 years, would be replaced in year 16 and high efficiency CFL lighting, with an

⁴ <u>http://www.seia.org/research-resources/solar-market-insight-report-2014-q3</u>

⁵ <u>http://www.resnet.us/professional/standards/mortgage</u>

assumed service life of 5 years, would be replaced five times during the analysis period. Where incremental maintenance is required, a maintenance fraction is also included in the analysis.

Energy prices used in the economic analysis are the 2015 annual average U.S. prices for residential electricity and natural gas as provided by the U.S. Energy Information Administration.⁶ The base prices used for the analysis are \$0.1267/kWh for residential electricity⁷ and \$1.038/therm for residential natural gas.⁸ Energy prices are not varied by location in this report.

Cost Effectiveness

For the purposes of this study 'cost effective' is defined as the case in which the present value of the life-cycle energy cost reductions (the savings) exceeds the present value of the life-cycle improvement costs (the investment). The ratio of these two present values (Savings / Investment) is referred to as the savings-to-investment ratio or SIR. If the SIR is greater than unity, there is a net financial benefit derived from the investment. The net present value (NPV) of the improvements is also calculated, where NPV equals the present value of the life-cycle energy cost savings minus the present value of the life-cycle improvement costs.

Figure 3 illustrates life-cycle cost economic analysis theory with respect to residential energy efficiency. The Baseline Home has no improvement costs, no energy savings and 100% of the Baseline life-cycle total costs (the red dot on the plot). The Improvement Cost curve (dotted red line) represents the life-cycle costs of energy improvements that can be made to the baseline home. There are normally improvements that can be made to the baseline home that will reduce energy use at very




Figure 3: Generalized plot of life-cycle cost economic analysis theory.

low cost. However, as energy use continues to be reduced, the cost of the improvements per unit of energy savings increases, resulting in an Improvement Cost curve that is exponential in nature. The sum of the Improvement Cost curve and the Energy Cost line (dashed purple line) yield the Total Cost curve (solid green line).

There is a point on the Total Cost curve where the present value of the life-cycle cost of the residence is minimized. For Figure 3, this point occurs at about 37% life-cycle energy cost savings (light green tringle). There is another point on the Total Cost curve where

⁶ <u>http://www.eia.gov/</u>

⁷ http://www.eia.gov/electricity/monthly/epm_table_grapher.cfm?t=epmt_5_3

⁸ <u>http://www.eia.gov/dnav/ng/ng_pri_sum_dcu_nus_a.htm</u>

the total life-cycle cost of the improved home is equal to the total life-cycle cost of the baseline home (light blue diamond at about 59% life-cycle energy cost savings). This point is often referred to as the neutral cost point. By definition it has an SIR of exactly 1.0 (i.e. life-cycle costs = life-cycle savings). While Figure 3 is only illustrative, it accurately represents the principles of life-cycle cost economics and cost effectiveness for home energy improvements.

Findings

This Work

The summary of findings in this study are presented in Tables 13 - 16 for each study scenario by IECC climate zone. Results are given as climate zone averages for the TMY3 sites in each climate zone. The column labels are as follows:

ERI = Energy Rating Index (per ANSI/RESNET/ICC Standard 301-2014) 1st Cost = initial cost of energy improvements with respect to the Baseline Home LC Cost = present value of the life-cycle energy improvement costs 1stYr Save = initial year energy cost savings with respect to the Baseline Home LC Save = present value of the life-cycle energy cost savings NPV = Net Present Value of energy improvements = (LC Save) - (LC Cost) SIR = Saving/Investment Ratio = (LC Save) / (LC Cost)

Table 13. Summary results for Scenario 1: 2015 IECC prescriptive compliance case

Climate Zone	ERI	1st Cost	LC Cost	1stYr Save	LC Save	NPV	SIR
Zone 1	70	\$258	\$243	\$63	\$1,717	\$1,475	7.07
Zone 2	68	\$800	\$576	\$94	\$2,568	\$1,992	4.46
Zone 3	64	\$2,422	\$2,165	\$191	\$5,216	\$3,051	2.41
Zone 4	73	\$2,135	\$1,904	\$180	\$4,911	\$3,007	2.58
Zone 5	77	\$1,498	\$1,474	\$124	\$3,395	\$1,921	2.30
Zone 6	75	\$1,974	\$1,927	\$183	\$5,007	\$3,080	2.60
Zone 7	73	\$2,457	\$2,352	\$274	\$7,486	\$5,135	3.18
Zone 8	75	\$2,462	\$2,361	\$367	\$10,034	\$7,673	4.25

Table 13 illustrates the fact that compliance with the prescriptive minimum efficiency requirements of the 2015 IECC is highly cost effective. Interestingly, the largest SIR occurs in the climate (zone 1) with the smallest stringency increase between the 2009 and 2015 IECC. However, the NPV for climate zone 1 is relatively small, especially when compared with the present value savings that are achieved in climate zone 8.

However, compliance with only these minimum prescriptive requirements does not achieve ERI scores that are compliant with Section R406 of the 2015 IECC.

Climate Zone	ERI	1st Cost	LC Cost	1stYr Save	LC Save	NPV	SIR
Zone 1	52	\$7,140	\$10,870	\$467	\$12,756	\$1,886	1.17
Zone 2	52	\$7,000	\$10,657	\$469	\$12,818	\$2,161	1.20
Zone 3	51	\$8,925	\$13,587	\$597	\$16,319	\$2,731	1.23
Zone 4	54	\$11,760	\$17,903	\$733	\$20,027	\$2,124	1.12
Zone 5	55	\$11,340	\$17,264	\$702	\$19,194	\$1,930	1.11
Zone 6	54	\$13,440	\$20,461	\$818	\$22,353	\$1,893	1.09
Zone 7	53	\$17,430	\$26,535	\$1,041	\$28,441	\$1,906	1.07
Zone 8	53	\$33,600	\$51,152	\$1,406	\$38,433	-\$12,719	0.75

Table 14. Summary results for Scenario 2: Baseline Home + PV case

On the other hand, the ERI scores for Scenario 2 shown in Table 14 are fully compliant with Section R406 of the 2015 IECC. However, because these scores are achieved using only on-site photovoltaic power, the NPV and SIR for Scenario 2 are significantly smaller than for Scenario 1, with climate zones 6 and 7 showing only marginal cost effectiveness and added PV in climate zone 8 being not cost effective to the consumer.

1 4010 1.	Table 15. Summary results for Secharlo 5. 2015 ILCC + 1 V case										
Climate Zone	ERI	1st Cost	LC Cost	1stYr Save	LC Save	NPV	SIR				
Zone 1	52	\$6,348	\$9,514	\$461	\$12,596	\$3,082	1.32				
Zone 2	52	\$5,840	\$8,249	\$429	\$11,730	\$3,481	1.42				
Zone 3	51	\$7,170	\$9,385	\$505	\$13,808	\$4,424	1.47				
Zone 4	54	\$9,695	\$13,413	\$650	\$17,775	\$4,362	1.32				
Zone 5	55	\$9,793	\$14,102	\$640	\$17,485	\$3,383	1.24				
Zone 6	54	\$11,214	\$15,994	\$744	\$20,339	\$4,345	1.27				
Zone 7	53	\$12,957	\$18,337	\$901	\$24,619	\$6,282	1.34				
Zone 8	53	\$23,252	\$34,012	\$1,237	\$33,807	-\$204	0.99				

Table 15. Summary results for Scenario 3: 2015 IECC + PV case

Scenario 3 combines the enhanced efficiency measures of the 2015 IECC prescriptive compliance case with sufficient on-site photovoltaic power to achieve Section R406 ERI compliance. This scenario requires smaller photovoltaic systems to reach this ERI compliance thresholds than does Scenario 2 and takes advantage of the improved energy efficiency cost effectiveness of the 2015 IECC prescriptive compliance to achieve larger NPV and SIR results than Scenario 2. Added PV in climate zone 8 continues to be not cost effective to the consumer in this scenario.

Climate Zone	ERI	1st Cost	LC Cost	1stYr Save	LC Save	NPV	SIR
Zone 1	52	\$3,086	\$5,367	\$410	\$11,211	\$5,844	2.09
Zone 2	52	\$3,613	\$5,673	\$421	\$11,515	\$5,842	2.03
Zone 3	51	\$4,064	\$6,018	\$444	\$12,122	\$6,104	2.02
Zone 4	54	\$3,893	\$5,322	\$482	\$13,159	\$7,837	2.47
Zone 5	55	\$3,361	\$5,086	\$425	\$11,614	\$6,528	2.28
Zone 6	54	\$3,793	\$5,457	\$499	\$13,632	\$8,176	2.50
Zone 7	53	\$4,252	\$5,840	\$627	\$17,123	\$11,283	2.93
Zone 8	53	\$4,260	\$5,854	\$848	\$23,182	\$17,328	3.96

Table 16. Summary results for Scenario 4: Efficiency only case

Scenario 4 comprises only energy efficiency upgrades to achieve R406 ERI compliance scores. This scenario achieves the largest NPV and SIR of the four scenarios. Thus, it is the most cost effective means of R406 ERI compliance of the scenarios studied. In all

climate zones the SIR exceeds a value of 2.0, meaning that the present value of life-cycle energy cost savings are at least two times greater than the present value of the life-cycle improvement costs.

Other Works

Apart from the findings of this study, a study of the economic cost-effectiveness of 3rd party Power Purchase Agreements (PPA) has also been conducted (Fairey and Sonne, 2016). This PPA study uses the same building configurations and TMY3 locations as reported in this study with the exception that climate zones 7 & 8 are not included. The PPA study was different in the following ways:

- Only the Baseline Home configuration is used in the analysis
- The amount of annual PV production added to the Baseline Home is approximately equal to 75% of the annual electrical consumption
- The cost to the consumer for PV-produced power is set equal to 80% of the cost to the consumer for utility-purchased power
- A 20-year, present value life-cycle cost analysis is used
- Both the life-cycle present value cost of the conventional power system and the life-cycle present value cost of the PPA power system are computed
- A savings to investment ratio (SIR) is not calculated because there is no investment cost to the consumer
- The net present value (NPV) to the consumer is equal to the difference between the life-cycle present values of the conventional power case and the PPA case

Results from the PPA study for the 14 TMY3 cities are shown in Table 17 and the results for the climate zone 1-6 averages are shown in Table 18.

LOCATION	IECC	Utility Electric	PV Size	ERI		Annual Electricity Use and Production			NPV
	CZ	Price (Wdc)	Base Case	PV Case	Total (kWh)	PV (kWh)	% PV	(\$)	
Miami, FL	1A	0.1145	6200	75	18	11937	8993	75.3	\$3809
Orlando, FL	2A	0.1145	5925	75	18	10779	8111	75.2	\$3435
Houston, TX	2A	0.1101	6650	77	19	12014	9032	75.2	\$3678
Phoenix, AZ	2B	0.1129	5500	74	18	13056	9857	75.5	\$4116
Charleston, SC	3A	0.1178	6750	76	19	12886	9666	75.0	\$4212
Charlotte, NC	3A	0.1092	4125	78	45	7755	5876	75.8	\$2373
Oklahoma City, OK	3A	0.0951	4500	78	49	8289	6267	75.6	\$2204
Las Vegas, NV	3B	0.1178	3950	72	34	9371	7051	75.2	\$3072
Baltimore, MD	4A	0.1284	4200	84	54	7443	5571	74.9	\$2646
Kansas City, MO	4A	0.1021	3950	84	57	7549	5669	75.1	\$2141
Chicago, IL	5A	0.1177	4050	86	60	6840	5092	74.4	\$2217
Denver, CO	5B	0.1145	3200	85	56	6608	4938	74.7	\$2091
Minneapolis, MN	6A	0.1138	3950	86	62	6802	5145	75.6	\$2166
Billings, MT	6B	0.1026	3525	85	59	6593	4931	74.8	\$1871
Averages		0.1122	4748	80	41	9137	6871	75.2	\$2859

Table 17. Summary	results from PPA	study in 13 TMY3 cities

Climate	Utility Electric	PV Size	ER	I	Annual and	·	NPV	
Zone	Price (\$/kWh)	(Wdc)	Base Case	PV Case	Total (kWh)	PV (kWh)	% PV	(\$)
Zone 1	0.1145	6200	75	18	11937	8993	75.3	\$3,809
Zone 2	0.1125	6025	75	18	11950	9000	75.3	\$3,743
Zone 3	0.1100	4831	76	37	9575	7215	75.4	\$2,965
Zone 4	0.1153	4075	84	56	7496	5620	75.0	\$2,394
Zone 5	0.1161	3625	86	58	6724	5015	74.6	\$2,154
Zone 6	0.1082	3738	86	61	6698	5038	75.2	\$2,019

Table 18. Climate zone averages from PPA study results

While this PPA reaches ERIs that would easily qualify as compliant with the 2015 IECC in climate zones 1-3, the ERI for the homes in climate zones 4-6 would not qualify as compliant with the ERI requirements of the 2015 IECC. This occurs because climate zones 4-6 employ gas space and water heating systems, significantly reducing the total electric use (see Total kWh column in Table 18). Thus, offsetting 75% of their electric use with the PPA is not sufficient to move their ERI down to the 2015 IECC compliance level.

Conclusions

Achieving compliance with the ERI provisions of the 2015 IECC can be cost effective in all cases studied. While cost effective compliance may be achieved in most climate zones using only on-site photovoltaic power generation, compliance using energy efficiency measures is shown to have greater economic cost effectiveness in all cases studied.

Energy Efficiency-Only Scenarios (Scenario 1 and Scenario 4)

Scenario 1 (2015 IECC Prescriptive Compliance Case) and Scenario 4 (complying with the ERI path using only energy efficiency measures) have the highest savings-to-investment ratios of the four scenarios. The present value of the savings from energy efficiency in both of these scenarios is at least double the costs: for every dollar invested in energy efficiency, a homeowner will receive \$2 or more in energy savings.

Scenario 4 has the highest NPV of any of the scenarios, and still has a SIR greater than 2 for all climate zones. Overall, this is the most cost-effective scenario over the life of the energy efficiency improvements: it is best, from a consumer economics perspective, to have a home that complies with the ERI pathway of the 2015 IECC using only energy efficiency measures.

In addition, the energy-efficiency-only Scenarios 1 and 4 have lower first costs for the consumer than Scenarios 2 or 3 (both of which involve the consumer purchasing a PV system). Complying with the ERI path of the code using only efficiency (Scenario 4) has a higher first cost than complying with the prescriptive path of the code (Scenario 1), but also has a much higher lifecycle cost savings and NPV in all climate zones. A home built under the ERI compliance method is significantly more efficient than a home built under the prescriptive compliance method, so the additional savings are expected.

PV Scenarios (Scenarios 2, 3 and PPA)

Scenarios 2 and 3 comply with the ERI path of the code, using various combinations of energy efficiency measures and purchased PV systems. Except in climate zone 8, both scenarios are cost-effective for the consumer, though they both have a lower NPV and SIR than the efficiency-only scenarios due to the upfront cost of the PV system. Lifecycle savings are larger than in the efficiency-only scenarios but so are lifecycle costs. Therefore, the cost-effectiveness of both PV scenarios is highly sensitive to the cost of the PV system, including the impact of available tax credits. As PV prices continue to decline, there may be a tipping point when homes that include PV become more cost-effective for the consumer than homes that comply with the code using only efficiency. However, we are not yet at that price point. Under the assumptions made in this report, the cost of PV would need to be \$2.00-\$2.25 per peak Watt before this is the case.

The PPA cases shown in Table 18 also utilizes PV. However, the PPA cases are not always compliant with the ERI path of the code. In climate zones 1-3 the ERI scores for the PPA case would easily comply but for climate zones 4-6, they would not. Climate zones 7 and 8 were not considered for the PPA case.

Figure 4 compares the NPV for the four scenarios of this study with the PPA case from Fairey and Sonne (2016). Only six of the eight climate zones are charted because the PPA study did not evaluate PPAs for climate zones 7 and 8.

Of the two PV scenarios in this study, it is more economically beneficial from a consumer perspective to have an efficient home prior to "filling the gap"




Figure 4. Comparison of Net Present Value (NPV) for four scenarios studied along with NPV results from PPA study.

with PV. Scenario 3 (Min 2015+PV), where the home meets the 2015 IECC prescriptive requirements prior to installing a PV system, has lower first costs, lower lifecycle costs, and higher NPV and SIR than the home in Scenario 2 (Max ERI+PV) that meets only the minimum efficiency requirements. This is also true for the PPA case, where the PPA case produces a larger NPV than Scenario 3 only in climate zones 1 and 2. For climate zones 3-6, Scenario 3 produces greater consumer benefits than the PPA case. As a reminder, the PPA case is modeled using the Baseline Home configuration. Figure 4 also graphically illustrates that the largest consumer benefits (NPV) accrue from scenario 4 (HighEff), regardless of climate zone.

There are many benefits of PV, including reduced utility bills and low carbon production. On-site PV helps jurisdictions meet net-zero energy consumption goals and producing energy is very desirable for both consumers and builders. However, from a consumer economics perspective, it is still most beneficial to ensure that the home is energy efficient prior to investing in on-site power generation.

References

- ANSI/RESNET/ICC 301-2014, "Standard for the Calculation and Labeling of the Energy Performance of Low-Rise Residential Buildings Using an Energy Rating Index." Residential Energy Services Network, Oceanside, CA. (<u>http://codes.iccsafe.org/app/book/content/PDF/ICC%20Standards/ICC_301-2014/ICC_RESNET_301.pdf</u>)
- Duffie, J.A. and W.A. Beckman (1980), *Solar Engineering of Thermal Processes*, pp. 398-406, John Wylie & Sons, Inc., New York, NY.
- Fairey, P. (2013), "Analysis of HERS Index Scores for Recent Versions of the International Energy Conservation Code (IECC)." Report No. FSEC-CR-1941-13, Florida Solar Energy Center, Cocoa, FL. (http://www.fsec.ucf.edu/en/publications/pdf/FSEC-CR-1941-13_R01.pdf)
- Fairey, P. and D. Parker (2012), "Cost Effectiveness of Home Energy Retrofits in Pre-Code Vintage Homes in the United States." Report No. FSEC-CR-1939-12, Florida Solar Energy Center, Cocoa, FL. (<u>http://www.fsec.ucf.edu/en/publications/pdf/FSEC-CR-1939-12.pdf</u>)
- Fairey, P. and J. Sonne (2016), "Lennar Ventures Power Purchase Agreement Analysis." Report No. FSEC-CR-2032-16, Florida Solar Energy Center, Cocoa, FL. (http://www.fsec.ucf.edu/en/publications/pdf/FSEC-CR-2032-16.pdf)
- ICC (2015), "2015 International Energy Conservation Code." International Code Council, 500 New Jersey Avenue, NW, Washington, DC.
- NAHB (2009), "Economic Database in Support of ASHRAE 90.2 (Energy Efficient Design of Low-Rise Residential Buildings) 1481-RP." Report #3296_051409, NAHB Research Center, Upper Marlboro, MD.
- U.S. Department of Energy, 10 CFR Part 430, "Energy Conservation Standards for Residential Water Heaters, Direct Heating Equipment, and Pool Heaters." Federal Register/Vol. 75, No. 73/ Friday, April 16, 2010/Rules and Regulations, National Archives and Records Administration, Washington, DC.
- U.S. Department of Energy, 10 CFR Part 430, "Energy Conservation Standards for Residential Furnaces and Residential Central Air Conditioners and Heat Pumps." Federal Register/Vol. 76, No. 123/ Monday, June 27, 2011/Rules and Regulations, National Archives and Records Administration, Washington, DC.

	Maximum		ni Homes (Ba e (Scenario 0		Improved	,			
Scenario	kWh/y	Th/y	\$/yr	, ERI	kWh/y	Th/y	\$/yr	ERI	Complies
1: 2015 Min	11,900	0	\$1,508	75	11,404	0	\$1,445	70	No
		0			,	0		52	Yes
2: Max ERI + PV 3: 2015 Min + PV	11,900	0	\$1,508	75	8,216	0	\$1,041		
	11,900 11,900	0	\$1,508	75 75	8,262	0	\$1,047	52 52	Yes Yes
4: High Eff	11,900	0	\$1,508	75	8,662	0	\$1,097	52	res
	Savings over	er Max EF	RI Home		Costs Effe	ctiveness		P1 =	27.328
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SIR
1: 2015 Min	496	0	\$63	4.2%	\$258	\$243	\$1,717	\$1,475	7.07
2: Max ERI + PV	3,684	0	\$467	31.0%	\$7,140	\$10,870	\$12,756	\$1,886	1.17
3: 2015 Min + PV	3,638	0	\$461	30.6%	\$6,348	\$9,514	\$12,596	\$3,082	1.32
4: High Eff	3,238	0	\$410	27.2%	\$3,086	\$5,367	\$11,211	\$5,844	2.09
Scenario 1: 2015 Min Hom	20								
Measure	ic .	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	1
Duct Qn $0.08 \rightarrow 0.04$		Sases	\$250	\$250	svc me 30	maint	1.096	\$274	
SEER14HP*		\$4,665	\$4,606	-\$58	15		1.839	-\$107	
Capacity (kBtu)		30.0	29.0						
SEER		14	14						
HSPF		8.2	8.2	* 2.5	20		1.00 €	#2 0	
Windows: 1.2/0.3→0.5		\$5,250	\$5,286	\$36	30		1.096	\$39	
Envelope: 7 ach50→5 a	ach50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
			Totals	\$258				\$243	
Scenario 2: Max ERI + PV	7 Home								
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
PV System (Wdc):	2,550	\$0	\$7,140	\$7,140	30	1.94%	1.522	\$10,870	
· · · ·	•		Totals	\$7,140				\$10,870	
				+ •)= • •				+=0,010	1
Scenario 3: 2015 Min + PV	/ Home		- +	- +					1
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER14HP*		\$4,665	\$4,606	-\$58	15		1.839	-\$107	
Capacity (kBtu)		30.0	29.0						
SEER		14.0	14.0						
		8.2	8.2						
HSPF	5/0.25	\$5,250	\$5,286	\$36	30		1.096	\$39	
Windows: 1.2/0.3→0.5			\$125	\$25	30		1.096	\$27	
Windows: 1.2/0.3→0.5 Envelope: 7 ach50→5		\$100					1		1
Windows: 1.2/0.3→0.5		\$100 \$0	\$125	\$5	15		1.839	\$9	
Windows: 1.2/0.3→0.5 Envelope: 7 ach50→5				\$5	15		1.839	\$9	
Windows: 1.2/0.3→0.5 Envelope: 7 ach50→5				\$5	15		1.839	\$9	
Windows: 1.2/0.3→0.5 Envelope: 7 ach50→5				\$5	15		1.839	\$9	
Windows: 1.2/0.3→0.5 Envelope: 7 ach50→5				\$5	15		1.839	\$9	
Windows: 1.2/0.3→0.5 Envelope: 7 ach50→5				\$5	15 	1.94%	1.839	\$9	

	Miar	ni Homes (B	ase attic AL	OS; Qn=0.08)		
Scenario 4: High Efficiency Home							
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER15.5HP*	\$4,665	\$4,988	\$324	15		1.839	\$595
Capacity (kBtu)	30.0	20.0					
SEER	14.0	15.5					
HSPF	8.2	8.8					
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873
Windows: 1.2/0.3→0.5/0.25	\$5,250	\$5,286	\$36	30		1.096	\$39
Envelope: 7 ach50 \rightarrow 5 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
RBS	\$0	\$542	\$542	30		1.096	\$594
HPWH	\$300	\$1,000	\$700	15	2.22%	2.327	\$1,629
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
		Totals	\$3,086				\$5,367

	Maximum		e (Scenario 0		S; Qn=0.08		Improved Homes				
G • .				/	-		ф /	EDI	C		
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Comp No		
1: 2015 Min	10,743	0	\$1,361	75	10,268	0	\$1,301	<u>69</u>			
2: Max ERI + PV	10,743	0	\$1,361	75	7,457	0	\$945 \$976	52	Ye		
3: 2015 Min + PV	10,743	0	\$1,361	75	7,701	0	\$976	52	Ye		
4: High Eff	10,743	0	\$1,361	75	7,759	0	\$983	52	Ye		
	Savings ove	er Max ER	RI Home		Costs Effe	ctiveness		P1 =	27.328		
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SI		
1: 2015 Min	475	0	\$60	4.4%	\$803	\$583	\$1,645	\$1,061	2.8		
2: Max ERI + PV	3,286	0	\$416	30.6%	\$6,720	\$10,230	\$11,378	\$1,147	1.1		
3: 2015 Min + PV	3,042	0	\$385	28.3%	\$6,053	\$8,576	\$10,533	\$1,957	1.2		
4: High Eff	2,984	0	\$378	27.8%	\$3,969	\$6,329	\$10,332	\$4,003	1.6		
Scenario 1: 2015 Min Hon	ne										
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost			
Duct Qn $0.08 \rightarrow 0.04$	1	\$0	\$250	\$250	30		1.096	\$274			
SEER14HP*	•	\$4,665	\$4,391	-\$274	15		1.839	-\$503			
Capacity (kBtu)		30.0	25.3	φ <i>⊒ι</i> Γ	1.5		1.007	<i>4000</i>			
SEER		14.0	14.0								
HSPF		8.2	8.2								
Windows: 0.65/0.3-	→0 40/0 25	\$5,252	\$5,498	\$246	30		1.096	\$269			
Envelope: 7 ach50–		\$100	\$125	\$25	30		1.096	\$27			
Enverope: / dene o	e dene o										
Factory Sealed AHI	Ţ	\$0	\$5	\$5	15		1 839	.89			
Factory Sealed AHU Ceiling: R-30→R-3		\$0 \$2,068	\$5 \$2,620	\$5 \$552	15 50		1.839 0.919	\$9 \$507			
	8		\$2,620	\$552				\$507			
Ceiling: R-30→R-3	8		\$2,620	\$552		Maint		\$507			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV	8	\$2,068	\$2,620 Totals	\$552 \$803	50	Maint 1.94%	0.919	\$507 \$583			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure	8 V Home	\$2,068	\$2,620 Totals	\$552 \$803 Incr\$	50 svc life		0.919	\$507 \$583 LC Cost			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc):	8 V Home 2,400	\$2,068	\$2,620 Totals Improv\$ \$6,720	\$552 \$803 Incr\$ \$6,720	50 svc life		0.919	\$507 \$583 LC Cost \$10,230			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV	8 V Home 2,400	\$2,068 Base\$ \$0	\$2,620 Totals Improv\$ \$6,720 Totals	\$552 \$803 Incr\$ \$6,720 \$6,720	50 svc life 30	1.94%	0.919 P2 1.522	\$507 \$583 LC Cost \$10,230 \$10,230			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure	8 V Home 2,400 V Home	\$2,068 Base\$ \$0 Base\$	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$	\$552 \$803 Incr\$ \$6,720 \$6,720 Incr\$	50 svc life 30 svc life		0.919 P2 1.522 P2	\$507 \$583 LC Cost \$10,230 \$10,230 LC Cost			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04	8 V Home 2,400 V Home	\$2,068 Base\$ \$0 Base\$ \$0	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$ \$250	\$552 \$803 Incr\$ \$6,720 \$6,720 Incr\$ \$250	50 svc life 30 svc life 30	1.94%	0.919 P2 1.522 P2 1.096	\$507 \$583 LC Cost \$10,230 \$10,230 LC Cost \$274			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14HP*	8 V Home 2,400 V Home	\$2,068 Base\$ \$0 Base\$ \$0 \$4,665	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$ \$250 \$4,391	\$552 \$803 Incr\$ \$6,720 \$6,720 Incr\$	50 svc life 30 svc life	1.94%	0.919 P2 1.522 P2	\$507 \$583 LC Cost \$10,230 \$10,230 LC Cost			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14HP* Capacity (kBtu)	8 V Home 2,400 V Home	\$2,068 Base\$ \$0 Base\$ \$0 \$4,665 30.0	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$ \$250 \$4,391 25.3	\$552 \$803 Incr\$ \$6,720 \$6,720 \$6,720 Incr\$ \$250	50 svc life 30 svc life 30	1.94%	0.919 P2 1.522 P2 1.096	\$507 \$583 LC Cost \$10,230 \$10,230 LC Cost \$274			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14HP* Capacity (kBtu) SEER	8 V Home 2,400 V Home	\$2,068 Base\$ \$0 Base\$ \$0 \$4,665 30.0 14.0	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$ \$250 \$4,391 25.3 14.0	\$552 \$803 Incr\$ \$6,720 \$6,720 \$6,720 Incr\$ \$250	50 svc life 30 svc life 30	1.94%	0.919 P2 1.522 P2 1.096	\$507 \$583 LC Cost \$10,230 \$10,230 LC Cost \$274			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14HP* Capacity (kBtu) SEER HSPF	8 V Home 2,400 V Home	\$2,068 \$2,068 Base\$ \$0 Base\$ \$0 \$4,665 30.0 14.0 8.2	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$ \$250 \$4,391 25.3 14.0 8.2	\$552 \$803 Incr\$ \$6,720 \$6,720 \$6,720 Incr\$ \$250 -\$274	50 svc life 30 15	1.94%	0.919 P2 1.522 P2 1.096 1.839	\$507 \$583 LC Cost \$10,230 \$10,230 LC Cost \$274 -\$503			
Ceiling: R-30 \rightarrow R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure Duct Qn 0.08 \rightarrow 0.04 SEER14HP* Capacity (kBtu) SEER HSPF Windows: 0.65/0.3-	8 V Home 2,400 V Home 4 →0.4/0.25	\$2,068 \$2,068 Base\$ \$0 \$0 \$4,665 30.0 14.0 8.2 \$5,252	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$ \$250 \$4,391 25.3 14.0 8.2 \$5,498	\$552 \$803 \$6,720 \$6,720 \$6,720 \$250 -\$274 \$2246	50 svc life 30 15 30 30	1.94%	0.919 P2 1.522 P2 1.096 1.839 1.096	\$507 \$583 LC Cost \$10,230 \$10,230 \$10,230 \$274 -\$503 \$274 -\$503			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14HP* Capacity (kBtu) SEER HSPF Windows: 0.65/0.3- Envelope: 7 ach50-	8 V Home 2,400 V Home 4 →0.4/0.25 →5 ach50	\$2,068 \$2,068 Base\$ \$0 Base\$ \$0 \$4,665 30.0 14.0 8.2 \$5,252 \$100	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$ \$250 \$4,391 25.3 14.0 8.2 \$5,498 \$125	\$552 \$803 \$6,720 \$6,720 \$6,720 \$250 -\$274 \$2246 \$25	50 svc life 30 15 30 30 30 30	1.94%	0.919 P2 1.522 P2 1.096 1.839 1.096 1.096	\$507 \$583 LC Cost \$10,230 \$10,230 \$10,230 \$274 -\$503 \$274 -\$503 \$269 \$27			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14HP* Capacity (kBtu) SEER HSPF Windows: 0.65/0.3- Envelope: 7 ach50- Factory Sealed AHU	8 V Home 2,400 V Home 4 $\rightarrow 0.4/0.25$ $\rightarrow 5 \text{ ach }50$ J	\$2,068 \$2,068 Base\$ \$0 Base\$ \$0 \$4,665 30.0 14.0 8.2 \$5,252 \$100 \$0	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$ \$250 \$4,391 25.3 14.0 8.2 \$5,498 \$125 \$5	\$552 \$803 \$6,720 \$6,720 \$6,720 \$6,720 \$250 -\$274 \$250 -\$274 \$250 \$255 \$5	50 svc life 30 15 30 30 30 30 15	1.94%	0.919 P2 1.522 1.522 P2 1.096 1.839 1.096 1.096 1.096 1.839	\$507 \$583 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$269 \$27 \$9			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14HP* Capacity (kBtu) SEER HSPF Windows: 0.65/0.3- Envelope: 7 ach50-	8 V Home 2,400 V Home 4 $\rightarrow 0.4/0.25$ $\rightarrow 5 \text{ ach }50$ J	\$2,068 \$2,068 Base\$ \$0 Base\$ \$0 \$4,665 30.0 14.0 8.2 \$5,252 \$100	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$ \$250 \$4,391 25.3 14.0 8.2 \$5,498 \$125	\$552 \$803 \$6,720 \$6,720 \$6,720 \$250 -\$274 \$2246 \$25	50 svc life 30 15 30 30 30 30	1.94%	0.919 P2 1.522 P2 1.096 1.839 1.096 1.096	\$507 \$583 LC Cost \$10,230 \$10,230 \$10,230 \$274 -\$503 \$274 -\$503 \$269 \$27			
Ceiling: R-30→R-3 Scenario 2: Max ERI + PV Measure PV System (Wdc): Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14HP* Capacity (kBtu) SEER HSPF Windows: 0.65/0.3- Envelope: 7 ach50- Factory Sealed AHU	8 V Home 2,400 V Home 4 $\rightarrow 0.4/0.25$ $\rightarrow 5 \text{ ach }50$ J	\$2,068 \$2,068 Base\$ \$0 Base\$ \$0 \$4,665 30.0 14.0 8.2 \$5,252 \$100 \$0	\$2,620 Totals Improv\$ \$6,720 Totals Improv\$ \$250 \$4,391 25.3 14.0 8.2 \$5,498 \$125 \$5	\$552 \$803 \$6,720 \$6,720 \$6,720 \$6,720 \$250 -\$274 \$250 -\$274 \$250 \$255 \$5	50 svc life 30 15 30 30 30 30 15	1.94%	0.919 P2 1.522 1.522 P2 1.096 1.839 1.096 1.096 1.096 1.839	\$507 \$583 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$10,230 \$269 \$27 \$9			

	Orland	o Homes (Ba	ase attic AD	S; Qn=0.08)			
Scenario 4: High Efficiency Home							
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER15.5HP*	\$4,665	\$5,110	\$446	15		1.839	\$820
Capacity (kBtu)	30.0	22.1					
SEER	14.0	15.5					
HSPF	8.2	8.6					
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873
Windows: 0.65/0.3→0.40/0.25	\$5,252	\$5,498	\$246	30		1.096	\$269
Envelope: 7 ach50→5 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
Ceiling: R-30→R-38	\$2,068	\$2,620	\$552	50		0.919	\$507
RBS	\$0	\$542	\$542	30		1.096	\$593
HPWH	\$300	\$1,000	\$700	15	2.22%	2.327	\$1,629
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
		Totals	\$3,969				\$6,329

		Housto	n Homes (Ba	ase attic AD	OS; Qn=0.08)			
	Maximum	ERI Hom	e (Scenario ())	Improved	Homes			
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Complies
1: 2015 Min	11,990	0	\$1,519	77	11,188	0	\$1,418	70	No
2: Max ERI + PV	11,990	0	\$1,519	77	8,033	0	\$1,018	52	Yes
3: 2015 Min + PV	11,990	0	\$1,519	77	8,347	0	\$1,058	52	Yes
4: High Eff	11,990	0	\$1,519	77	8,471	0	\$1,073	52	Yes
	Savings ove	er Max Fl	21 Home		Costs Effe	ctiveness		P1 =	27.328
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SIR
1: 2015 Min	802	<u> </u>	\$102	6.7%	\$786	\$551	\$2,777	\$2,226	5.04
2: Max ERI + PV	3,957	0	\$501	33.0%	\$780	\$12,468	\$13,701	\$1,233	1.10
2: Max EKI + FV 3: 2015 Min + PV	3,643	0	\$462	30.4%	\$6,666	\$9,503	\$12,614	\$1,255	1.10
4: High Eff	3,519	0	\$446	29.3%	\$3,905	\$6,211	\$12,014	\$5,974	1.96
		0	ψττυ	<i>27.37</i> 0	$\psi J, J U J$	ψ0,211	ψ1 2 ,10 1	ψ3,274	1.70
Scenario 1: 2015 Min Hom	le	Dame	T	T		N# - * 4	Da	LCC	1
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn $0.08 \rightarrow 0.04$		\$0	\$250	\$250	30		1.096	\$274	
SEER14HP*		\$5,072	\$4,781	-\$291	15		1.839	-\$536	
Capacity (kBtu)		37.0	32.0						
SEER		14.0	14.0						
HSPF	4/0.25	8.2	8.2	\$246	20		1.000	\$2(0	
Windows: 0.65/0.3→0		\$5,252	\$5,498	\$246	30		1.096	\$269	
Envelope: 7 ach50→5	ach50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU Ceiling: R-30→R-38		\$0 \$2,068	\$5 \$2,620	\$5 \$552	15 50		1.839 0.919	\$9 \$507	
Coning. R-50 / R-50		Ψ2,000	φ2,020	ψυυΔ	50		0.717	φ307	
			Totals	\$786				\$551	
Sconorio 2. Moy EDI + DU	Homo			,				,	
Scenario 2: Max ERI + PV	nome	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	1
Measure	2.025								
PV System (Wdc):	2,925	\$0	\$8,190 Totola	\$8,190	30	1.94%	1.522	\$12,468	
			Totals	\$8,190	l			\$12,468	J
Scenario 3: 2015 Min + PV	7 Home								1
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER14HP*		\$5,072	\$4,781	-\$291	15		1.839	-\$536	
Capacity (kBtu)		37.0	32.0						
SEER		14.0	14.0						
HSPF		8.2	8.2						
Windows: 0.65/0.3→0		\$5,252	\$5,498	\$246	30		1.096	\$269	
Envelope: 7 ach50→5	ach50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
Ceiling: R-30→R-38		\$2,068	\$2,620	\$552	50		0.919	\$507	
	1								
PV System (Wdc):	2,100	\$0	\$5,880	\$5,880	30	1.94%	1.522	\$8,952	
			Totals	\$6,666				\$9,503	

	Housto	n Homes (Ba	ase attic AD	S; Qn=0.08)	1		
Scenario 4: High Efficiency Home							
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER15.5HP*	\$5,072	\$5,454	\$382	15		1.839	\$702
Capacity (kBtu)	37.0	28.0					
SEER	14.0	15.5					
HSPF	8.2	8.6					
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873
Windows: 0.65/0.3→0.40/0.25	\$5,252	\$5,498	\$246	30		1.096	\$269
Envelope: 7 ach50 \rightarrow 5 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
Ceiling: R-30→R-38	\$2,068	\$2,620	\$552	50		0.919	\$507
RBS	\$0	\$542	\$542	30		1.096	\$593
HPWH	\$300	\$1,000	\$700	15	2.22%	2.327	\$1,629
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
		Totals	\$3,905				\$6,211

		Phoe	nix Homes (I	Base attic A	DS; Qn=0.0	(8)			
	Maximum	ERI Hom	e (Scenario 0)	Improved	Homes			
Scenario	kWh/y	Th/v	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Complies
1: 2015 Min	13,016	0	\$1,649	74	12,068	0	\$1,529	66	No
2: Max ERI + PV	13,016	0	\$1,649	74	9,153	0	\$1,160	52	Yes
3: 2015 Min + PV	13,016	0	\$1,649	74	9,538	0	\$1,208	52	Yes
4: High Eff	13,016	0	\$1,649	74	9,542	0	\$1,209	52	Yes
			. ,		,		+-,= • >		
~ ·	Savings over			<u> </u>	Costs Effe			P1 =	27.328
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SIR
1: 2015 Min	948	0	\$120	7.3%	\$809	\$594	\$3,282	\$2,688	5.53
2: Max ERI + PV	3,863	0	\$489	29.7%	\$6,090	\$9,271	\$13,376	\$4,104	1.44
3: 2015 Min + PV	3,478	0	\$441	26.7%	\$4,799	\$6,668	\$12,042	\$5,374	1.81
4: High Eff	3,474	0	\$440	26.7%	\$2,964	\$4,481	\$12,029	\$7,548	2.68
Scenario 1: 2015 Min Hor	me								_
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER14HP*		\$4,665	\$4,397	-\$268	15		1.839	-\$493	
Capacity (kBtu)		30.0	25.4						
SEER		14.0	14.0						
HSPF		8.2	8.2						
Windows: 0.65/0.3→0	0.40/0.25	\$5,252	\$5,498	\$246	30		1.096	\$269	
Envelope: 7 ach50→5		\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU	ueneo	\$0	\$5	\$5	15		1.839	\$9	
Ceiling: R-30→R-38		\$2,068	\$2,620	\$552	50		0.919	\$507	
			Totals	\$809				\$594	
Soonorio 2. Mor EDI + D	V Homo		Totulo	<i>4009</i>				ψυγι	1
Scenario 2: Max ERI + P	v Home	Dagat	T	Treast	1 : £-	Maint	D2	I.C.C.art	
Measure	0.175	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
PV System (Wdc):	2,175	\$0	\$6,090	\$6,090	30	1.94%	1.522	\$9,271	
			Totals	\$6,090				\$9,271	
Scenario 3: 2015 Min + P	V Home								_
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER14HP*		\$4,665	\$4,397	-\$268	15		1.839	-\$493	
Capacity (kBtu)		30.0	25.4						
SEER		14.0	14.0						1
HSPF		8.2	8.2						1
Windows: 0.65/0.3→0	0.4/0.25	\$5,252	\$5,498	\$246	30		1.096	\$269	
Envelope: 7 ach50→5		\$100	\$125	\$25	30		1.096	\$27	1
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
Ceiling: R-30→R-38		\$2,068	\$2,620	\$552	50		0.919	\$507	
		<i>42,000</i>	φ2,020	<i>ψυυμ</i>	50		0.717	ψ507	
PV System (Wdc):	1,425	\$0	\$3,990	\$3,990	30	1.94%	1.522	\$6,074	
			Totals	\$4,799				\$6,668]

Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER14HP*	\$4,665	\$4,105	-\$559	15		1.839	-\$1,028
Capacity (kBtu)	30.0	20.4					
SEER	14.0	14.0					
HSPF	8.2	8.2					
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873
Windows: 0.65/0.3→0.40/0.25	\$5,252	\$5,498	\$246	30		1.096	\$269
Envelope: 7 ach50 \rightarrow 5 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
Ceiling: R-30→R-38	\$2,068	\$2,620	\$552	50		0.919	\$507
RBS	\$0	\$542	\$542	30		1.096	\$593
HPWH	\$300	\$1,000	\$700	15	2.22%	2.327	\$1,629
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
		Totals	\$2,964				\$4,481

Г

Appendix A

		Charles	ston Homes (Base craw	ADS; Qn=).08)			
	Maximum	ERI Hom	e (Scenario 0)	Improved	Homes			
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Complies
1: 2015 Min	12,846	0	\$1,628	76	11,513	0	\$1,459	65	No
2: Max ERI + PV	12,846	0	\$1,628	76	8,550	0	\$1,083	51	Yes
3: 2015 Min + PV	12,846	0	\$1,628	76	8,935	0	\$1,132	51	Yes
4: High Eff	12,846	0	\$1,628	76	8,872	0	\$1,124	51	Yes
0		M. EI						D1	27.229
a .	Savings ove			0 (Costs Effe		TGG	P1 =	27.328
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SIR
1: 2015 Min	1,333	0	\$169	10.4%	\$2,402	\$2,129	\$4,615	\$2,487	2.17
2: Max ERI + PV	4,296	0	\$544	33.4%	\$8,400	\$12,788	\$14,875	\$2,087	1.16
3: 2015 Min + PV	3,911	0	\$496	30.4%	\$7,326	\$9,587	\$13,542	\$3,955	1.41
4: High Eff	3,974	0	\$504	30.9%	\$3,913	\$5,952	\$13,760	\$7,808	2.31
Scenario 1: 2015 Min Hor	ne								-
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER14HP*		\$4,548	\$4,286	-\$262	15		1.839	-\$482	
Capacity (kBtu)		28.0	23.5	-					
SEER		14.0	14.0						
HSPF		8.2	8.2						
Windows: 0.5/0.3→0.	35/0.25	\$5,286	\$5,900	\$614	30		1.096	\$672	
Envelope: 7 ach50→3		\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
Ceiling: R-30→R-38		\$2,068	\$2,620	\$552	50		0.919	\$507	
Wall cavity: R-13 \rightarrow R-	-20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121	
			Totals	\$2,402				\$2,129	
Scenario 2: Max ERI + P	V Home								
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
PV System (Wdc):	3,000	\$0	\$8,400	\$8,400	30	1.94%	1.522	\$12,788	
	-,	+ -	Totals	\$8,400				\$12,788	
			100000	<i></i>				<i><i>q</i>12<i>,,00</i></i>	
Scenario 3: 2015 Min + P	V Home	~ *	- •						l
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER14HP*		\$4,665	\$4,286	-\$379	15		1.839	-\$696	
Capacity (kBtu)		30.0	23.5						
SEER		14.0	14.0						
HSPF		8.2	8.2						
Windows: 0.5/0.3→0.		\$5,286	\$5,900	\$614	30		1.096	\$672	
Envelope: 7 ach50→3	ach50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
Ceiling: R-30→R-38		\$2,068	\$2,620	\$552	50		0.919	\$507	
Wall cavity: R-13→R-	-20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121	
PV System (Wdc):	1,800	\$0	\$5,040	\$5,040	30	1.94%	1.522	\$7,673	
			Totals	\$7,326				\$9,587	

	Charles	ston Homes	(Base crawl	ADS; Qn=0.	.08)		
Scenario 4: High Efficiency Home							
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER15HP*	\$4,665	\$4,686	\$22	15		1.839	\$40
Capacity (kBtu)	30.0	20.0					
SEER	14.0	15.0					
HSPF	8.2	8.8					
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873
Windows: 0.5/0.3→0.35/0.25	\$5,286	\$5,900	\$614	30		1.096	\$672
Envelope: 7 ach50 \rightarrow 3 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
Ceiling: R-30→R-38	\$2,068	\$2,620	\$552	50		0.919	\$507
RBS	\$0	\$542	\$542	30		1.096	\$593
HPWH	\$300	\$1,000	\$700	15	2.22%	2.327	\$1,629
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
		Totals	\$3,913				\$5,952

		Charlotte Homes (Base crawl									
	Maximum ERI Home (Scenario))	Improved Homes						
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Compli		
1: 2015 Min	7,792	511	\$1,518	78	7,418	374	\$1,328	65	No		
2: Max ERI + PV	7,792	511	\$1,518	78	2,984	511	\$908	51	Yes		
3: 2015 Min + PV	7,792	511	\$1,518	78	4,854	374	\$1,003	51	Yes		
4: High Eff	7,792	511	\$1,518	78	6,496	273	\$1,106	51	Yes		
	Savings ove	r May FI	21 Home		Costs Effe	ctivoness		P1 =	27.328		
Scenario		Δ Th/y		%save	1stCost	LC Cost	LC Save	NPV	SIR		
	Δ kWh/y		Δ \$/yr								
1: 2015 Min 2: Max ERI + PV	374 4,808	137 0	\$190 \$609	12.5%	\$2,420	\$2,162 \$14,387	\$5,181 \$16,648	\$3,019	2.40 1.16		
		137		40.1%	\$9,450 \$7,460			\$2,261			
3: 2015 Min + PV	2,938	238	\$514	33.9%	\$7,460	\$9,835 \$6,430	\$14,059	\$4,224	1.43		
4: High Eff	1,296	238	\$411	27.1%	\$4,558	\$6,430	\$11,239	\$4,808	1.75		
Scenario 1: 2015 Min Hor	ne		,		1		· · · · · · · · · · · · · · · · · · ·		1		
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost			
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274			
SEER14GF80*		\$4,180	\$3,936	-\$244	15		1.839	-\$448			
Capacity (kBtu)		23.0	18.0								
SEER		14.0	14.0								
Heating Capacity		32.0	25.0								
AFUE		0.80	0.80								
Windows: 0.5/0.3→0.	35/0.25	\$5,286	\$5,900	\$614	30		1.096	\$672			
Envelope: 7 ach50→3	ach50	\$100	\$125	\$25	30		1.096	\$27			
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9			
Ceiling: R-30→R-38		\$2,068	\$2,620	\$552	50		0.919	\$507			
			Tatala	¢2 420				\$2.1(2			
Scenario 2: Max ERI + P	V Homo		Totals	\$2,420				\$2,162]		
	v Home	Daga¢	Immuor	Incr\$	ave life	Maint	DJ	I.C.Cost	1		
Measure	2.075	Base\$	Improv\$		svc life		P2	LC Cost			
PV System (Wdc):	3,375	\$0	\$9,450	\$9,450	30	1.94%	1.522	\$14,387			
			Totals	\$9,450				\$14,387			
Scenario 3: 2015 Min + P	V Home								-		
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost			
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274			
SEER14HP*		\$4,180	\$3,936	-\$244	15		1.839	-\$448			
Capacity (kBtu)		23.0	18.0								
SEER		14.0	14.0								
HSPF		32.0	25.0								
Windows: 0.5/0.3→0.	35/0.25	0.80	0.80								
Envelope: 7 ach50→3	ach50	\$5,286	\$5,900	\$614	30		1.096	\$672			
Factory Sealed AHU		\$100	\$125	\$25	30		1.096	\$27			
Ceiling: R-30→R-38		\$0	\$5	\$5	15		1.839	\$9			
Wall cavity: R-13→R-	-20	\$2,068	\$2,620	\$552	50		0.919	\$507			
·											
PV System (Wdc):	1,800	\$0	\$5,040	\$5,040	30	1.94%	1.522	\$7,673			
			Totals	\$7,460				\$9,835			

Charlotte Homes (Base crawl ADS; Qn=0.08)											
Scenario 4: High Efficiency Home											
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost				
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096				
SEER14GF90*	\$4,180	\$4,169	-\$11	15		1.839	-\$20				
Capacity (kBtu)	23.0	20.0									
SEER	14.0	14.0									
Heating Capacity	32.0	25.0									
AFUE	0.80	0.90									
Lighting: 75% FL \rightarrow 100%FL	\$360	\$540	\$180	5		4.847	\$873				
Windows: 0.5/0.3→0.35/0.25	\$5,286	\$5,900	\$614	30		1.096	\$672				
Envelope: 7 ach50 \rightarrow 3 ach50	\$100	\$125	\$25	30		1.096	\$27				
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9				
Ceiling: R-30→R-38	\$2,068	\$2,620	\$552	50		0.919	\$507				
Wall cavity: R-13→R-20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121				
Tnkless gasWH (EF=0.83)	\$600	\$1,000	\$700	15	2.29%	2.342	\$1,640				
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138				
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276				
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92				
		Totals	\$4,558				\$6,430				

Appendix A

		Oklahom	a City Home	es (Base cra	wl ADS; Qn	=0.08)			
	Maximum		e (Scenario (Improved				
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Complies
1: 2015 Min	8,320	710	\$1,791	79	7,861	515	\$1,531	64	No
2: Max ERI + PV	8,320	710	\$1,791	79	2,471	710	\$1,050	51	Yes
3: 2015 Min + PV	8,320	710	\$1,791	79	5,041	515	\$1,173	51	Yes
4: High Eff	8,320	710	\$1,791	79	6,954	386	\$1,282	51	Yes
Scenario	Savings ove			0/ 2070	Costs Effe		I C Com	P1 =	27.328
	Δ kWh/y 459	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SIR 2.20
1: 2015 Min		195 0	\$261	14.5%	\$2,420	\$2,162	\$7,121 \$20,252	\$4,958	3.29
2: Max ERI + PV 3: 2015 Min + PV	5,849 3,279	195	\$741 \$618	41.4% 34.5%	\$11,760 \$8,090	\$17,903 \$10,794	\$16,885	\$2,349 \$6,091	1.13 1.56
$\frac{32013 \text{ Mill} + PV}{4: \text{ High Eff}}$	1,366	324	\$509	28.4%	\$8,090		\$13,921	\$0,091	2.35
	•	324	\$309	20.4%	\$4,007	\$5,923	\$13,921	\$1,991	2.33
Scenario 1: 2015 Min Hom	le			- +					1
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER14GF80*		\$4,180	\$3,936	-\$244	15		1.839	-\$448	
Capacity (kBtu)		23.0	18.0						
SEER		14.0	14.0						
Heating Capacity		32.0	25.0						
AFUE		0.80	0.80				1 00 1		
Windows: 0.5/0.3→0.3		\$5,286	\$5,900	\$614	30		1.096	\$672	
Envelope: 7 ach50 \rightarrow 3	ach50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
Ceiling: R-30→R-38		\$2,068	\$2,620	\$552	50		0.919	\$507	
Wall cavity: R-13→R-2	20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121	
			Totals	\$2,420				\$2,162	
Scenario 2: Max ERI + PV	Homo			<i>,</i>				+-,-*-	1
Measure	Home	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	1
	4 200								
PV System (Wdc):	4,200	\$0	\$11,760	\$11,760	30	1.94%	1.522	\$17,903	
			Totals	\$11,760				\$17,903	
Scenario 3: 2015 Min + PV	/ Home						I		1
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER14GF80*		\$4,180	\$3,936	-\$244	15		1.839	-\$448	
Capacity (kBtu)		23.0	18.0		ļ				
SEER		14.0	14.0		ļ				
Heating Capacity		32.0	25.0						
AFUE		0.80	0.80						
Windows: 0.5/0.3→0.3		\$5,286	\$5,900	\$614	30		1.096	\$672	
Envelope: 7 ach50 \rightarrow 3	ach50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
Ceiling: R-30→R-38		\$2,068	\$2,620	\$552	50		0.919	\$507	
Wall cavity: R-13→R-2	20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121	
	2.025	* C		AF (TC)		1.0.400	1 500	#0.500	
PV System (Wdc):	2,025	\$0	\$5,670	\$5,670	30	1.94%	1.522	\$8,632	
			Totals	\$8,090				\$10,794	J

Oklahoma City Homes (Base crawl ADS; Qn=0.08)											
Scenario 4: High Efficiency Home											
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost				
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096				
SEER14GF90*	\$4,180	\$4,169	-\$11	15		1.839	-\$20				
Capacity (kBtu)	23.0	20.0									
SEER	14.0	14.0									
Heating Capacity	32.0	25.0									
AFUE	0.80	0.90									
Lighting: 75% FL \rightarrow 100% FL	\$360	\$540	\$180	5		4.847	\$873				
Windows: 0.5/0.3→0.35/0.25	\$5,286	\$5,900	\$614	30		1.096	\$672				
Envelope: 7 ach50 \rightarrow 3 ach50	\$100	\$125	\$25	30		1.096	\$27				
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9				
Wall cavity: R-13→R-20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121				
Tnkless gasWH (EF=0.83)	\$600	\$1,000	\$700	15	2.29%	2.342	\$1,640				
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138				
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276				
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92				
		Totals	\$4,007				\$5,923				

		Las Ve	gas Homes (l	Base crawl	ADS; Qn=0	.08)			
	Maximum		e (Scenario 0		Improved				
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Complies
1: 2015 Min	9,372	330	\$1,530	72	8,781	263	\$1,386	62	No
2: Max ERI + PV	9,372	330	\$1,530	72	5,514	325	\$1,036	51	Yes
3: 2015 Min + PV	9,372	330	\$1,530	72	6,653	283	\$1,137	51	Yes
4: High Eff	9,372	330	\$1,530	72	7,559	214	\$1,180	51	Yes
	Savings ove	r Max Fl	PI Home		Costs Effe	ctiveness		P1 =	27.328
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SIR
1: 2015 Min	591	<u>67</u>	\$144	9.4%	\$2,445	\$2,207	\$3,947	\$1,740	1.79
2: Max ERI + PV	3,858	5	\$494	32.3%	\$6,090	\$9,271	\$13,500	\$4,229	1.46
3: 2015 Min + PV	2,719	47	\$393	25.7%	\$5,805	\$7,322	\$10,748	\$3,425	1.47
4: High Eff	1,813	116	\$350	22.9%	\$3,779	\$5,765	\$9,568	\$3,803	1.66
Scenario 1: 2015 Min Home					1- 1	,	1- 9	1 - 7	
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		Dase \$0	\$250	\$250	30		1.096	\$274	1
SEER14GF80*		\$4,332	\$4,112	-\$219	15		1.839	-\$403	1
Cooling Capacity (kB	stu)	27.0	22.5	Ψ217	15		1.057	ψτυ	1
SEER	(14)	14.0	14.0						
Heating Cap (kBtu)		27.0	20.7						
AFUE		0.80	0.80						
Windows: 0.5/0.3→0.35	5/0.25	\$5,286	\$5,900	\$614	30		1.096	\$672	
Envelope: 7 ach50→3 a		\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
Ceiling: R-30→R-38		\$2,068	\$2,620	\$552	50		0.919	\$507	
Wall cavity: R-13→R-2	0	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121	
								. ,	
			Totals	\$2,445				\$2,207	
Scenario 2: Max ERI + PV	Home								
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
		= 00.5 0 4							
PV System (Wdc):	2,175	\$0	\$6.090	\$6.090	30	1.94%	1.522	\$9.271	
PV System (Wdc):	2,175	\$0	\$6,090 Totals	\$6,090 \$6,090	30	1.94%	1.522	\$9,271 \$9.271	
		\$0	\$6,090 Totals	\$6,090 \$6,090	30	1.94%	1.522	\$9,271 \$9,271	
Scenario 3: 2015 Min + PV			Totals	\$6,090				\$9,271	1
Scenario 3: 2015 Min + PV Measure		Base\$	Totals Improv\$	\$6,090 Incr\$	svc life	1.94% Maint	P2	\$9,271 LC Cost	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04		Base\$ \$0	Totals Improv\$ \$250	\$6,090 Incr\$ \$250	svc life 30		P2 1.096	\$9,271 LC Cost \$274	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80*		Base\$ \$0 \$4,332	Totals Improv\$ \$250 \$4,112	\$6,090 Incr\$	svc life		P2	\$9,271 LC Cost	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80* Capacity (kBtu)		Base\$ \$0 \$4,332 27.0	Totals Improv\$ \$250 \$4,112 22.5	\$6,090 Incr\$ \$250	svc life 30		P2 1.096	\$9,271 LC Cost \$274	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80* Capacity (kBtu) SEER		Base\$ \$0 \$4,332 27.0 14.0	Totals Improv\$ \$250 \$4,112 22.5 14.0	\$6,090 Incr\$ \$250	svc life 30		P2 1.096	\$9,271 LC Cost \$274	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu)		Base\$ \$0 \$4,332 27.0 14.0 27.0	Totals Improv\$ \$250 \$4,112 22.5 14.0 20.7	\$6,090 Incr\$ \$250	svc life 30		P2 1.096	\$9,271 LC Cost \$274	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE	Home	Base\$ \$0 \$4,332 27.0 14.0 27.0 0.80	Totals Improv\$ \$250 \$4,112 22.5 14.0 20.7 0.80	\$6,090 Incr\$ \$250 -\$219	svc life 30 15		P2 1.096 1.839	\$9,271 LC Cost \$274 -\$403	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Windows: 0.5/0.3→0.35	Home	Base\$ \$0 \$4,332 27.0 14.0 27.0 \$5,286	Totals Improv\$ \$250 \$4,112 22.5 14.0 20.7 0.80 \$5,900	\$6,090 Incr\$ \$250 -\$219 \$614	svc life 30 15 30		P2 1.096 1.839 	\$9,271 LC Cost \$274 -\$403 \$672	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Windows: 0.5/0.3→0.3: Envelope: 7 ach50→3 a	Home	Base\$ \$0 \$4,332 27.0 14.0 27.0 0.80 \$5,286 \$100	Totals Improv\$ \$250 \$4,112 22.5 14.0 20.7 0.80 \$5,900 \$125	\$6,090 Incr\$ \$250 -\$219 \$614 \$25	svc life 30 15 30 30 30		P2 1.096 1.839 	\$9,271 LC Cost \$274 -\$403 \$672 \$27	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Windows: 0.5/0.3→0.3: Envelope: 7 ach50→3 a Factory Sealed AHU	Home	Base\$ \$0 \$4,332 27.0 14.0 27.0 \$6,286 \$100 \$0	Totals Improv\$ \$250 \$4,112 22.5 14.0 20.7 0.80 \$5,900 \$125 \$5	\$6,090 Incr\$ \$250 -\$219 \$614 \$25 \$5	svc life 30 15 30 30 30 15		P2 1.096 1.839 	\$9,271 LC Cost \$274 -\$403 \$672 \$27 \$9	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Windows: 0.5/0.3→0.32 Envelope: 7 ach50→3 a Factory Sealed AHU Ceiling: R-30→R-38	Home 5/0.25 ch50	Base\$ \$0 \$4,332 27.0 14.0 27.0 0.80 \$5,286 \$100 \$0 \$2,068	Totals Improv\$ \$250 \$4,112 22.5 14.0 20.7 0.80 \$5,900 \$125 \$5 \$2,620	\$6,090 Incr\$ \$250 -\$219 \$614 \$25 \$5 \$552	svc life 30 15 30 30 30 15 50		P2 1.096 1.839 1.096 1.096 1.839 0.919	\$9,271 LC Cost \$274 -\$403 \$672 \$27 \$9 \$507	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Windows: 0.5/0.3→0.3: Envelope: 7 ach50→3 a Factory Sealed AHU	Home 5/0.25 ch50	Base\$ \$0 \$4,332 27.0 14.0 27.0 \$6,286 \$100 \$0	Totals Improv\$ \$250 \$4,112 22.5 14.0 20.7 0.80 \$5,900 \$125 \$5	\$6,090 Incr\$ \$250 -\$219 \$614 \$25 \$5	svc life 30 15 30 30 30 15		P2 1.096 1.839 	\$9,271 LC Cost \$274 -\$403 \$672 \$27 \$9	
Scenario 3: 2015 Min + PV Measure Duct Qn 0.08→0.04 SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Windows: 0.5/0.3→0.32 Envelope: 7 ach50→3 a Factory Sealed AHU Ceiling: R-30→R-38	Home 5/0.25 ch50	Base\$ \$0 \$4,332 27.0 14.0 27.0 0.80 \$5,286 \$100 \$0 \$2,068	Totals Improv\$ \$250 \$4,112 22.5 14.0 20.7 0.80 \$5,900 \$125 \$5 \$2,620	\$6,090 Incr\$ \$250 -\$219 \$614 \$25 \$5 \$552	svc life 30 15 30 30 30 15 50		P2 1.096 1.839 1.096 1.096 1.839 0.919	\$9,271 LC Cost \$274 -\$403 \$672 \$27 \$9 \$507	

Las Vegas Homes (Base crawl ADS; Qn=0.08)										
cenario 4: High Efficiency Home										
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost			
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096			
SEER16GF92*	\$4,332	\$5,360	\$1,029	15		1.839	\$1,892			
Capacity (kBtu)	27.0	21.2								
SEER	14.0	16.0								
Heating Cap (kBtu)	27.0	18.7								
AFUE	0.80	0.92								
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873			
Windows: 0.5/0.3→0.35/0.25	\$5,286	\$5,900	\$614	30		1.096	\$672			
Envelope: 7 ach50→3 ach50	\$100	\$125	\$25	30		1.096	\$27			
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9			
Ceiling: R-30→R-38	\$2,068	\$2,620	\$552	50		0.919	\$507			
gasWH (EF=0.67)	\$600	\$700	\$100	15		1.839	\$184			
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138			
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276			
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92			
	1	Totals	\$3,779				\$5,765			

*Air conditioner / gas furnace cost calculations based on capacity, SEER and AFUE

		Baltim	ore Homes (Base crawl	ADS; Qn=0	.08)			
	Maximum		e (Scenario (Improved				
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Complies
1: 2015 Min	7,443	684	\$1,653	84	7,252	549	\$1,489	73	No
2: Max ERI + PV	7,443	684	\$1,653	84	1,971	684	\$960	54	Yes
3: 2015 Min + PV	7,443	684	\$1,653	84	3,671	549	\$1,035	54	Yes
4: High Eff	7,443	684	\$1,653	84	6,384	375	\$1,198	54	Yes
	Savings over	r May FI	21 Home		Costs Effe	ctivonoss		P1 =	27.328
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SIR
1: 2015 Min	191	135	\$164	9.9%	\$2,080	\$1,802	\$4,491	\$2,689	2.49
2: Max ERI + PV	5,472	0	\$693	41.9%	\$11,550	\$17,584	\$18,947	\$1,363	1.08
3: 2015 Min + PV	3,772	135	\$618	37.4%	\$9,640	\$13,311	\$16,890	\$3,579	1.03
4: High Eff	1,059	309	\$455	27.5%	\$3,852	\$5,246	\$12,432	\$7,186	2.37
		507	\$ + 55	27.370	\$5,652	\$5,240	ψ12 , 1 52	\$7,100	2.37
Scenario 1: 2015 Min Hom	ie	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	1
Measure						Maint			
Duct Qn 0.08→0.04 SEER14GF80*		\$0 \$4,127	\$250 \$3,950	\$250 -\$177	30 15		1.096 1.839	\$274 -\$326	
	Dtu)			-\$1//	15		1.039	-\$320	
Cooling Capacity (kl SEER	Diu)	21.5 14.0	18.0 14.0						
Heating Cap (kBtu)		35.0	28.4						
AFUE		0.80	0.80						
Envelope: 7 ach50 \rightarrow 3	ach50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU	acii30	\$100	\$125	\$25	15		1.839	\$27	
Ceiling: R-38→R-49		\$2,620	\$3,378	\$758	50		0.919	\$697	
Wall cavity: R-13→R-2	20	\$2,020	\$3,483	\$1,219	50		0.919	\$1,121	
wan cuvity. K 15 7K	20	ψ2,204	\$5,405	ψ1,217	50		0.919	ψ1,121	
			Totals	\$2,080				\$1,802	
Scenario 2: Max ERI + PV	Home								
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
PV System (Wdc):	4,125	\$0	\$11,550	\$11,550	30	1.94%	1.522	\$17,584	
			Totals	\$11,550				\$17,584	
Scenario 3: 2015 Min + PV	Home								-
Measure	Home	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
			-				1.096	\$274	
Duct On 0.08 \rightarrow 0.04		\$0	\$250	\$250	30				
Duct Qn 0.08→0.04 SEER14GF80*		\$0 \$4,127	\$250 \$3,950	\$250 -\$177	30 15				
SEER14GF80*		\$4,127	\$3,950	\$250 -\$177			1.839	-\$326	
SEER14GF80* Capacity (kBtu)		\$4,127 21.5	\$3,950 18.0						
SEER14GF80* Capacity (kBtu) SEER		\$4,127 21.5 14.0	\$3,950 18.0 14.0						
SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu)		\$4,127 21.5 14.0 35.0	\$3,950 18.0 14.0 28.4						
SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE	ach50	\$4,127 21.5 14.0 35.0 0.80	\$3,950 18.0 14.0 28.4 0.80	-\$177	15				
SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 :	ach50	\$4,127 21.5 14.0 35.0 0.80 \$100	\$3,950 18.0 14.0 28.4 0.80 \$125	-\$177 \$25	30		1.839	-\$326	
SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 Factory Sealed AHU	ach50	\$4,127 21.5 14.0 35.0 0.80 \$100 \$0	\$3,950 18.0 14.0 28.4 0.80 \$125 \$5	-\$177 \$25 \$5	15		1.839 1.096 1.839	-\$326	
SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 :		\$4,127 21.5 14.0 35.0 0.80 \$100 \$0 \$2,620	\$3,950 18.0 14.0 28.4 0.80 \$125 \$5 \$3,378	-\$177 \$25 \$5 \$758	15 		1.839 1.096 1.839 0.919	-\$326 \$27 \$9 \$697	
SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 Factory Sealed AHU Ceiling: R-38→R-49		\$4,127 21.5 14.0 35.0 0.80 \$100 \$0	\$3,950 18.0 14.0 28.4 0.80 \$125 \$5	-\$177 \$25 \$5	15 30 15 50		1.839 1.096 1.839	-\$326 \$27 \$9	
SEER14GF80* Capacity (kBtu) SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 Factory Sealed AHU Ceiling: R-38→R-49		\$4,127 21.5 14.0 35.0 0.80 \$100 \$0 \$2,620	\$3,950 18.0 14.0 28.4 0.80 \$125 \$5 \$3,378	-\$177 \$25 \$5 \$758	15 30 15 50	1.94%	1.839 1.096 1.839 0.919	-\$326 \$27 \$9 \$697	

Baltimore Homes (Base crawl ADS; Qn=0.08)											
Scenario 4: High Efficiency Home											
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost				
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096				
SEER14GF92*	\$4,127	\$4,117	-\$11	15		1.839	-\$19				
Capacity (kBtu)	21.5	18.0									
SEER	14.0	14.0									
Heating Cap (kBtu)	35.0	26.1									
AFUE	0.80	0.92									
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873				
Envelope: 7 ach50 \rightarrow 3 ach50	\$100	\$125	\$25	30		1.096	\$27				
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9				
Ceiling: R-38→R-49	\$2,620	\$3,378	\$758	50		0.919	\$697				
Wall cavity: R-13→R-20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121				
Tnkless gasWH (EF=0.83)	\$600	\$1,000	\$400	15	2.29%	2.342	\$937				
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138				
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276				
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92				
		Totals	\$3,852				\$5,246				

* Air conditioner / gas furnace cost calculations based on capacity, SEER and AFUE

Appendix A

	Manin		City Homes			•			
a .			e (Scenario (,	Improved		ф.(EDI	<i>a</i> "
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Complies
1: 2015 Min	7,535	829	\$1,815	84	7,421	655	\$1,620	72	No
2: Max ERI + PV	7,535	829	\$1,815	84	1,439	829	\$1,043	54	Yes
3: 2015 Min + PV	7,535	829	\$1,815	84	3,571	655	\$1,132	54	Yes
4: High Eff	7,535	829	\$1,815	84	6,564	458	\$1,307	54	Yes
	Savings ove	er Max EF	RI Home		Costs Effe	ctiveness		P1 =	27.328
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SIR
1: 2015 Min	114	174	\$195	10.7%	\$2,191	\$2,006	\$5,331	\$3,324	2.66
2: Max ERI + PV	6,096	0	\$772	42.6%	\$11,970	\$18,223	\$21,107	\$2,884	1.16
3: 2015 Min + PV	3,964	174	\$683	37.6%	\$9,751	\$13,515	\$18,661	\$5,146	1.38
4: High Eff	971	371	\$508	28.0%	\$3,935	\$5,398	\$13,886	\$8,488	2.57
Scenario 1: 2015 Min Hom	e								
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30	Maint	1.096	\$274	
SEER14GF80*		\$4,031	\$3,964	-\$67	15		1.839	-\$122	
Cooling Capacity (kl	Stu)	18.7	\$3,904 18.0	-907	15		1.037	-φ122	
SEER	Jtu)	14.0	14.0						
Heating Cap (kBtu)		41.0	32.0						
AFUE		0.80	0.80						
Envelope: 7 ach50 \rightarrow 3 ach50	ach50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
Ceiling: R-38→R-49		\$2,620	\$3,378	\$758	50		0.919	\$697	
Wall cavity: R-13→R-2	20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121	
		+_,_~	+++++++++++++++++++++++++++++++++++++++	+ - , >				+-,	
			Totals	\$2,191				\$2,006	
				+-,				+-,•••	
Scenario 2: Max ERI + PV	Home	D d	T A	T (\$	110		7.0	TOO /	1
Measure	1	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
PV System (Wdc):	4,275	\$0	\$11,970	\$11,970	30	1.94%	1.522	\$18,223	
			Totals	\$11,970				\$18,223	
Scenario 3: 2015 Min + PV	Home								_
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
D		ф О	¢250	\$250	30		1.096	\$274	
Duct Qn 0.08→0.04		\$0	\$250	\$250	50				
Duct Qn 0.08→0.04 SEER14GF80*		\$0 \$4,031	\$250	-\$67	15		1.839	-\$122	
	3tu)						1.839	-\$122	
SEER14GF80*	3tu)	\$4,031	\$3,964				1.839	-\$122	
SEER14GF80* Cooling Capacity (kl	3tu)	\$4,031 18.7	\$3,964 18.0				1.839	-\$122	
SEER14GF80* Cooling Capacity (kl SEER	3tu)	\$4,031 18.7 14.0	\$3,964 18.0 14.0				1.839	-\$122	
SEER14GF80* Cooling Capacity (kl SEER Heating Cap (kBtu)		\$4,031 18.7 14.0 41.0	\$3,964 18.0 14.0 32.0				1.839 	-\$122 \$27	
SEER14GF80* Cooling Capacity (kl SEER Heating Cap (kBtu) AFUE		\$4,031 18.7 14.0 41.0 0.80	\$3,964 18.0 14.0 32.0 0.80	-\$67	15				
SEER14GF80* Cooling Capacity (kl SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a		\$4,031 18.7 14.0 41.0 0.80 \$100	\$3,964 18.0 14.0 32.0 0.80 \$125	-\$67 \$25	30		1.096	\$27	
SEER14GF80* Cooling Capacity (kl SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a Factory Sealed AHU	ach50	\$4,031 18.7 14.0 41.0 0.80 \$100 \$0	\$3,964 18.0 14.0 32.0 0.80 \$125 \$5	-\$67 \$25 \$5	15 		1.096 1.839	\$27 \$9	
SEER14GF80* Cooling Capacity (kl SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 Factory Sealed AHU Ceiling: R-38→R-49	ach50	\$4,031 18.7 14.0 41.0 0.80 \$100 \$0 \$2,620	\$3,964 18.0 14.0 32.0 0.80 \$125 \$5 \$3,378	-\$67 \$25 \$5 \$758	15 30 15 50		1.096 1.839 0.919	\$27 \$9 \$697	
SEER14GF80* Cooling Capacity (kl SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 Factory Sealed AHU Ceiling: R-38→R-49	ach50	\$4,031 18.7 14.0 41.0 0.80 \$100 \$0 \$2,620	\$3,964 18.0 14.0 32.0 0.80 \$125 \$5 \$3,378	-\$67 \$25 \$5 \$758	15 30 15 50		1.096 1.839 0.919	\$27 \$9 \$697	
SEER14GF80* Cooling Capacity (kl SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 Factory Sealed AHU Ceiling: R-38→R-49	ach50	\$4,031 18.7 14.0 41.0 0.80 \$100 \$0 \$2,620	\$3,964 18.0 14.0 32.0 0.80 \$125 \$5 \$3,378	-\$67 \$25 \$5 \$758	15 30 15 50	1.94%	1.096 1.839 0.919	\$27 \$9 \$697	

	Kansas	City Homes	(Base crawl	ADS; Qn=0).08)		
Scenario 4: High Efficiency Home							
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER14GF90*	\$4,031	\$4,103	\$72	15		1.839	\$133
Capacity (kBtu)	18.7	18.0					
SEER	14.0	14.0					
Heating Cap (kBtu)	41.0	30.0					
AFUE	0.80	0.90					
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873
Envelope: 7 ach50 \rightarrow 3 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
Ceiling: R-38→R-49	\$2,620	\$3,378	\$758	50		0.919	\$697
Wall cavity: R-13→R-20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121
Tnkless gasWH (EF=0.83)	\$600	\$1,000	\$400	15	2.29%	2.342	\$937
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
		Totals	\$3,935	÷			\$5,398

Appendix A

	1	Chica	go Homes (H	Base ucBsm	t ADS; Qn=	,			
	Maximum	ERI Hom	e (Scenario	0)	Improved	Homes			
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Comp
1: 2015 Min	6,843	864	\$1,764	86	6,740	734	\$1,616	76	No
2: Max ERI + PV	6,843	864	\$1,764	86	809	864	\$999	55	Ye
3: 2015 Min + PV	6,843	864	\$1,764	86	2,497	735	\$1,079	55	Yes
4: High Eff	6,843	864	\$1,764	86	5,991	528	\$1,307	55	Ye
	Savings ove	er Max El	RI Home		Costs Effe	ctiveness		P1 =	27.328
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SIF
1: 2015 Min	103	130	\$148	8.4%	\$1,472	\$1,426	\$4,044	\$2,618	2.84
2: Max ERI + PV	6,034	0	\$765	43.3%	\$13,440	\$20,461	\$20,893	\$432	1.02
3: 2015 Min + PV	4,346	129	\$685	38.8%	\$10,922	\$15,813	\$18,707	\$2,895	1.1
4: High Eff	852	336	\$457	25.9%	\$3,300	\$4,974	\$12,481	\$7,507	2.5
Scenario 1: 2015 Min Hom	ie.								
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER13GF80*		\$3,484	\$3,408	-\$76	15		1.839	-\$139	
Cooling Capacity (kl	Btu)	19.0	18.0	Ŧ. 9				+>	
SEER	,	13.0	13.0						
Heating Cap (kBtu)		43.1	35.0						
AFUE		0.80	0.80						
Envelope: 7 ach50 \rightarrow 3	ach50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
Ceiling: R-38→R-49		\$2,620	\$3,378	\$758	50		0.919	\$697	
Windows: 0.35/0.4→0.	32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558	
			The dealer	¢1 470				¢1.426	
			Totals	\$1,472				\$1,426	
Scenario 2: Max ERI + PV	Home								1
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
PV System (Wdc):	4,800	\$0	\$13,440	\$13,440	30	1.94%	1.522	\$20,461	
			Totals	\$13,440				\$20,461	
Scenario 3: 2015 Min + PV	' Home								
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER13GF80*		\$3,484	\$3,408	-\$76	15		1.839	-\$139	
		19.0	18.0						
Capacity (kBtu)									
Capacity (kBtu) SEER		13.0	13.0						
SEER		13.0	13.0						
SEER Heating Cap (kBtu)	ach50	13.0 43.1	13.0 35.0	\$25	30		1.096	\$27	
SEER Heating Cap (kBtu) AFUE	ach50	13.0 43.1 0.80	13.0 35.0 0.80	\$25 \$5	30 15		1.096 1.839	\$27 \$9	
SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a	ach50	13.0 43.1 0.80 \$100	13.0 35.0 0.80 \$125						
SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a Factory Sealed AHU		13.0 43.1 0.80 \$100 \$0	13.0 35.0 0.80 \$125 \$5	\$5	15		1.839	\$9	
SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a Factory Sealed AHU Ceiling: R-38→R-49		13.0 43.1 0.80 \$100 \$0 \$2,620	13.0 35.0 0.80 \$125 \$5 \$3,378	\$5 \$758	15 50		1.839 0.919	\$9 \$697	
SEER Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a Factory Sealed AHU Ceiling: R-38→R-49		13.0 43.1 0.80 \$100 \$0 \$2,620	13.0 35.0 0.80 \$125 \$5 \$3,378	\$5 \$758	15 50	1.94%	1.839 0.919	\$9 \$697	

	Chica	go Homes (E	Base ucBsmt	ADS; Qn=0).08)		
Scenario 4: High Efficiency Home							
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER13GF96*	\$3,484	\$3,632	\$148	15		1.839	\$272
Capacity (kBtu)	19.0	18.0					
SEER	13.0	13.0					
Heating Cap (kBtu)	43.1	32.2					
AFUE	0.80	0.96					
Lighting: 75% FL \rightarrow 100% FL	\$360	\$540	\$180	5		4.847	\$873
Envelope: 7 ach50 \rightarrow 3 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
Ceiling: R-38→R-49	\$2,620	\$3,378	\$758	50		0.919	\$697
Windows: 0.35/0.4→0.32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558
Tnkless gasWH (EF=0.83)	\$600	\$1,000	\$400	15	2.29%	2.342	\$937
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
		Totals	\$3,300				\$4,974

Г

		Denve	r Homes (Ba	se ucBsmt	ADS; Qn=0.	.08)			
	Maximum		e (Scenario (Improved	<i>.</i>			
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Complies
1: 2015 Min	6,609	681	\$1,544	85	6,537	593	\$1,444	77	No
2: Max ERI + PV	6,609	681	\$1,544	85	1,556	681	\$904	55	Yes
3: 2015 Min + PV	6,609	681	\$1,544	85	2,633	593	\$949	55	Yes
4: High Eff	6,609	681	\$1,544	85	5,676	416	\$1,151	55	Yes
	Savings ove	r Max EF	RI Home		Costs Effe	ctiveness		P1 =	27.328
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	SIR
1: 2015 Min	72	88	\$100	6.5%	\$1,524	\$1,522	\$2,746	\$1,223	1.80
2: Max ERI + PV	5,053	0	\$640	41.5%	\$9,240	\$14,067	\$17,496	\$3,429	1.24
3: 2015 Min + PV	3,976	88	\$595	38.5%	\$8,664	\$12,392	\$16,263	\$3,871	1.31
4: High Eff	933	265	\$393	25.5%	\$3,422	\$5,198	\$10,748	\$5,550	2.07
Scenario 1: 2015 Min Hom	р р		L						1
Measure	C	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost]
Duct Qn 0.08→0.04		\$0	\$250	\$250	30	11101111	1.096	\$274	1
SEER13GF80*		\$3,403	\$3,380	-\$23	15		1.839	-\$43	
Cooling Capacity (kE	Stu)	18.0	18.0	-ψ23	15		1.057	τψ-	
SEER		13.0	13.0						
Heating Cap (kBtu)		33.8	28.0						
AFUE		0.80	0.80						
Envelope: 7 ach50 \rightarrow 3 a	ach50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$ <u>9</u>	
Ceiling: R-38→R-49		\$2,620	\$3,378	\$758	50		0.919	\$697	
Windows: 0.35/0.4→0.	32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558	
		1- 9		1					
			Totals	\$1,524				\$1,522	
Scenario 2: Max ERI + PV	Home								1
Measure	Home	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
PV System (Wdc):	3,300	\$0	\$9,240	\$9,240	30	1.94%	1.522	\$14,067	
r v System (vvde).	5,500	ψŪ	Totals	\$9,240	50	1.7470	1.522	\$14,067	
			Totals	φ 7 974				φ14,007	1
Scenario 3: 2015 Min + PV	Home	Daget	T	Treast	1 : £-	Maint	D2	I.C.C.a.t	1
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
Duct Qn $0.08 \rightarrow 0.04$		\$0	\$250	\$250	30		1.096	\$274	
SEER13GF80*		\$3,403	\$3,380	-\$23	15		1.839	-\$43	
Capacity (kBtu)		18.0	18.0						
SEER		13.0	13.0						
Heating Cap (kBtu)		33.8	28.0						
AFUE		0.80	0.80	ф о <i>Е</i>	20		1.000	007	
Envelope: 7 ach50→3 a	acn50	\$100	\$125	\$25	30		1.096	\$27	
Factory Sealed AHU		\$0	\$5 \$2.278	\$5	15		1.839	\$9	
Ceiling: $R-38 \rightarrow R-49$	22/0 4	\$2,620	\$3,378	\$758	50		0.919	\$697	
Windows: 0.35/0.4→0.	32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558	
	2.550	ф <u>о</u>	67.140	¢7 140	20	1.0.40/	1.522	¢10.070	
PV System (Wdc):	2,550	\$0	\$7,140	\$7,140	30	1.94%	1.522	\$10,870	
			Totals	\$8,664				\$12,392	l

	Denve	r Homes (Ba	ase ucBsmt A	ADS; Qn=0.0	08)		
Scenario 4: High Efficiency Home							
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER13GF96*	\$3,403	\$3,623	\$220	15		1.839	\$404
Capacity (kBtu)	18.0	18.0					
SEER	13.0	13.0					
Heating Cap (kBtu)	33.8	30.0					
AFUE	0.80	0.96					
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873
Envelope: 7 ach50 \rightarrow 3 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
Ceiling: R-38→R-49	\$2,620	\$3,378	\$758	50		0.919	\$697
Windows: 0.35/0.4→0.32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558
Tnkless gasWH (EF=0.83)	\$600	\$1,000	\$400	15	2.29%	2.342	\$937
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
Low-flow fixtures (Nbr+2)	\$250	\$300	\$50	15		1.839	\$92
		Totals	\$3,422				\$5,198

		Minneap	olis Homes (Base ucBsr	nt ADS; Qn	=0.08)		
	Maximum	ERI Hom	e (Scenario ())	Improved	Homes		
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI
1: 2015 Min	6,803	1,015	\$1,916	86	6,701	839	\$1,720	75
2: Max ERI + PV	6,803	1,015	1,916	86	9	1,011	\$1,051	54
3: 2015 Min + PV	6,803	1,015	1,916	86	2,042	839	\$1,130	54
4: High Eff	6,803	1,015	1,916	86	5,959	610	\$1,388	54
	Savings ove	er Max EF	RI Home		Costs Effe	ctiveness		P1 =
cenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV
1: 2015 Min	102	176	\$196	10.2%	\$1,969	\$1,917	\$5,346	\$3,429
2: Max ERI + PV	6,794	4	\$865	45.2%	\$14,700	\$22,379	\$23,637	\$1,258
3: 2015 Min + PV	4,761	176	\$786	41.0%	\$12,049	\$17,263	\$21,477	\$4,215
4: High Eff	844	405	\$527	27.5%	\$3,778	\$5,429	\$14,411	\$8,982
cenario 1: 2015 Min Hoi	ne							
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274
SEER13GF80*		\$3,458	\$3,419	-\$39	15		1.839	-\$72
Cooling Capacity ((Btu)	18.0	18.0					
SEER		13.0	13.0					
Heating Cap (kBtu)		47.3	37.6					
AFUE		0.80	0.80					
Envelope: 7 ach50→3	ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9
Wall cavity: R-13→R-	-20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121
Windows: 0.35/0.4→0	0.32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558
								+
			Totals	\$1,969				\$1,917
cenario 2: Max ERI + P'	V Home	- +						
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
PV System (Wdc):	5,250	\$0	\$14,700	\$14,700	30	1.94%	1.522	\$22,379
			Totals	\$14,700				\$22,379
cenario 3: 2015 Min + P	V Home							
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274
SEER13GF80*		\$3,458	\$3,419	-\$39	15		1.839	-\$72
Capacity (kBtu)		18.0	18.0					
SEER		13.0	13.0					
Heating Cap (kBtu)		47.3	37.6					
AFUE		0.80	0.80					
Envelope: 7 ach50→3	ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9
Wall cavity: R-13→R	-20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121
Windows: 0.35/0.4→0	0.32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558
	2 (00	\$0	\$10,080	\$10,080	30	1 0 4 0/	1 500	\$15.246
DV System (WIJ-).		50		510.080	.50	1.94%	1.522	\$15,346
PV System (Wdc):	3,600	φυ	Totals	\$12,049				\$17,263

	Minneap	olis Homes ((Base ucBsm	nt ADS; Qn=	=0.08)		
Scenario 4: High Efficiency Home							
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER13GF96*	\$3,458	\$3,623	\$165	15		1.839	\$303
Capacity (kBtu)	18.0	18.0					
SEER	13.0	13.0					
Heating Cap (kBtu)	47.3	30.0					
AFUE	0.80	0.96					
Lighting: 75% FL \rightarrow 100% FL	\$360	\$540	\$180	5		4.847	\$873
Envelope: 7 ach50 \rightarrow 3 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
Wall cavity: R-13→R-20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121
Windows: 0.35/0.4→0.32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558
Tnkless gasWH (EF=0.83)	\$600	\$1,000	\$400	15	2.29%	2.342	\$937
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
		Totals	\$3,778				\$5,429

		Billing	s Homes (Ba	ase ucBsmt	ADS; Qn=0	.08)		
	Maximum	ERI Hom	e (Scenario ())	Improved	Homes		
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI
1: 2015 Min	6,608	856	\$1,726	86	6,505	704	\$1,555	75
2: Max ERI + PV	6,608	856	\$1,726	86	523	856	\$955	54
3: 2015 Min + PV	6,608	856	\$1,726	86	2,308	704	\$1,023	54
4: High Eff	6,608	856	\$1,726	86	5,763	506	\$1,255	54
	Savings ove	er Max EF	RI Home		Costs Effe	ctiveness		P1 =
cenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV
1: 2015 Min	103	152	\$171	9.9%	\$1,980	\$1,937	\$4,668	\$2,732
2: Max ERI + PV	6,085	0	\$771	44.7%	\$12,180	\$18,543	\$21,069	\$2,527
3: 2015 Min + PV	4,300	152	\$703	40.7%	\$10,380	\$14,725	\$19,200	\$4,476
4: High Eff	845	350	\$470	27.3%	\$3,808	\$5,484	\$12,854	\$7,370
cenario 1: 2015 Min Hon	10		<u>.</u>		. ,	. ,	. , .	. ,
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274
SEER13GF80*		\$3,429	\$3,400	-\$28	15		1.839	-\$52
Cooling Capacity (k	Btu)	18.0	18.0	<i>42</i> 0	10		1.007	Ψ υ 2
SEER	·/	13.0	13.0					
Heating Cap (kBtu)		40.0	33.0					
AFUE		0.80	0.80					
Envelope: 7 ach50 \rightarrow 3	ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9
Wall cavity: R-13→R-	20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121
Windows: 0.35/0.4→0		\$5,900	\$6,409	\$509	30		1.096	\$558
			Totals	\$1,980				\$1,937
cenario 2: Max ERI + PV	/ Home				1		I	
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
PV System (Wdc):	4,350	\$0	\$12,180	\$12,180	30	1.94%	1.522	\$18,543
			Totals	\$12,180				\$18,543
cenario 3: 2015 Min + PV	V Home							
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274
SEER13GF80*		\$3,429	\$3,400	-\$28	15		1.839	-\$52
Capacity (kBtu)		18.0	18.0					
SEER		13.0	13.0					
Heating Cap (kBtu)		40.0	33.0					
AFUE		0.80	0.80					
Envelope: 7 ach50→3	ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9
Wall cavity: R-13→R-	20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121
Windows: 0.35/0.4→0	.32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558
		* ~	¢ 0 ·	A		4		A
PV System (Wdc):	3,000	\$0	\$8,400 Totals	\$8,400 \$10,380	30	1.94%	1.522	\$12,788 \$14,725

	Billings Homes (Base ucBsmt ADS; Qn=0.08)												
Scenario 4: High Efficiency Home													
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost						
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096						
SEER13GF96*	\$3,429	\$3,623	\$195	15		1.839	\$358						
Capacity (kBtu)	18.0	18.0											
SEER	13.0	13.0											
Heating Cap (kBtu)	40.0	30.1											
AFUE	0.80	0.96											
Lighting: 75% FL \rightarrow 100% FL	\$360	\$540	\$180	5		4.847	\$873						
Envelope: 7 ach50 \rightarrow 3 ach50	\$100	\$125	\$25	30		1.096	\$27						
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9						
Wall cavity: R-13→R-20	\$2,264	\$3,483	\$1,219	50		0.919	\$1,121						
Windows: 0.35/0.4→0.32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558						
Tnkless gasWH (EF=0.83)	\$600	\$1,000	\$400	15	2.29%	2.342	\$937						
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138						
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276						
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92						
		Totals	\$3,808				\$5,484						

		0	,		ADS; Qn=0.0				
			e (Scenario	,	Improved		<u> </u>		1
Scenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI	Co
1: 2015 Min	6,784	1,229	\$2,135	87	6,629	984	\$1,861	73	
2: Max ERI + PV	6,784	1,229	\$2,135	87	-1,430	1,229	\$1,095	53	
3: 2015 Min + PV	6,784	1,229	\$2,135	87	1,681	984	\$1,234	53	
4: High Eff	6,784	1,229	\$2,135	87	5,894	734	\$1,509	53	
	Savings ove	er Max El	RI Home		Costs Effe	ctiveness		P1 =	27
Scenario	Δ kWh/y	Δ Th/y	Δ \$/yr	%save	1stCost	LC Cost	LC Save	NPV	
1: 2015 Min	155	245	\$274	12.8%	\$2,457	\$2,352	\$7,486	\$5,135	
2: Max ERI + PV	8,214	0	\$1,041	48.7%	\$17,430	\$26,535	\$28,441	\$1,906	
3: 2015 Min + PV	5,103	245	\$901	42.2%	\$12,957	\$18,337	\$24,619	\$6,282	
4: High Eff	890	495	\$627	29.3%	\$4,252	\$5,840	\$17,123	\$11,283	
Scenario 1: 2015 Min Ho	me								
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost]
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	1
SEER13GF80*		\$3,486	\$3,433	-\$54	15		1.839	-\$99]
Cooling Capacity (kBtu)	18.0	18.0						1
SEER		13.0	13.0						1
Heating Cap (kBtu)	54.3	41.0						1
AFUE	,	0.80	0.80						1
Envelope: 7 ach50-	3 ach50	\$100	\$125	\$25	30		1.096	\$27	1
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9	
Wall cavity: R-21→R	8-20+5	\$3,657	\$5,378	\$1,721	50		0.919	\$1,582	
Windows: $0.35/0.4 \rightarrow$		\$5,900	\$6,409	\$509	30		1.096	\$558	
				** ***				+ - -	
			Totals	\$2,457				\$2,352	
Scenario 2: Max ERI + P	V Home						· · · · ·		1
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	
PV System (Wdc):	6,225	\$0	\$17,430	\$17,430	30	1.94%	1.522	\$26,535	
			Totals	\$17,430				\$26,535	
Scenario 3: 2015 Min + F	PV Home	-							-
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost	l
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274	
SEER13GF80*		\$3,486	\$3,433	-\$54	15		1.839	-\$99	
Capacity (kBtu)		18.0	18.0						
SEER		13.0	13.0						
Heating Cap (kBtu)	54.3	41.0						
AFUE		0.80	0.80]
Envelope: 7 ach50→3	3 ach50	\$100	\$125	\$25	30		1.096	\$27]
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9]
Wall cavity: R-21→R	8-20+5	\$3,657	\$5,378	\$1,721	50		0.919	\$1,582	1
Windows: 0.35/0.4→		\$5,900	\$6,409	\$509	30		1.096	\$558	1
		. / /	. ,]
PV System (Wdc):	3,750	\$0	\$10,500	\$10,500	30	1.94%	1.522	\$15,985	
			Totals	\$12,957				\$18,337	

	Farge	Homes (Ba	se ucBsmt A	DS; Qn=0.0	8)		
cenario 4: High Efficiency Home							
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER13GF93*	\$3,486	\$3,623	\$137	15		1.839	\$252
Capacity (kBtu)	18.0	18.0					
SEER	13.0	13.0					
Heating Cap (kBtu)	54.3	41.0					
AFUE	0.80	0.93					
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873
Envelope: 7 ach50→3 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
Wall cavity: R-21 \rightarrow R-20+5	\$3,657	\$5,378	\$1,721	50		0.919	\$1,582
Windows: 0.35/0.4→0.32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558
Tnkless gasWH (EF=0.83)	\$600	\$1,000	\$400	15	2.29%	2.342	\$937
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
		Totals	\$4,252				\$5,840

Appendix A

		Fairbar	nks Homes (l		t ADS; Qn=	,		
	Maximum E	RI Home ((Scenario 0)		Improved H	omes		
cenario	kWh/y	Th/y	\$/yr	ERI	kWh/y	Th/y	\$/yr	ERI
1: 2015 Min	7,035	1,771	\$2,730	89	6,816	1,444	\$2,362	75
2: Max ERI + PV	7,035	1,771	\$2,730	89	-4,065	1,771	\$1,323	53
3: 2015 Min + PV	7,035	1,771	\$2,730	89	-50	1,444	\$1,493	53
4: High Eff	7,035	1,771	\$2,730	89	6,091	1,069	\$1,881	53
	Savings over	Max ERI	Home		Costs Effect	iveness		P1 =
enario	Δ kWh/y	Δ Th/y	∆ \$/yr	%save	1stCost	LC Cost	LC Save	NPV
1: 2015 Min	219	327	\$367	13.5%	\$2,462	\$2,361	\$10,034	\$7,673
2: Max ERI + PV	11,100	0	\$1,406	51.5%	\$33,600	\$51,152	\$38,433	-\$12,719
3: 2015 Min + PV	7,085	327	\$1,237	45.3%	\$23,252	\$34,012	\$33,807	-\$204
4: High Eff	944	702	\$848	31.1%	\$4,260	\$5,854	\$23,182	\$17,328
enario 1: 2015 Min Home								
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274
SEER13GF80*		\$3,493	\$3,445	-\$48	15		1.839	-\$89
Cooling Capacity (kB	tu)	18.0	18.0					
SEER		13.0	13.0					
Heating Cap (kBtu)		56.0	44.0					
AFUE		0.80	0.80					
Envelope: 7 ach50→3 a	ch50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU		\$0	\$5	\$5	15		1.839	\$9
Wall cavity: R-21→R-20	0+5	\$3,657	\$5,378	\$1,721	50		0.919	\$1,582
Windows: 0.35/0.4→0.3	32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558
								** **
			Totals	\$2,462				\$2,361
cenario 2: Max ERI + PV	Home	• •	-					
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
PV System (Wdc):	12,000	\$0	\$33,600	\$33,600	30	1.94%	1.522	\$51,152
			Totals	\$33,600				\$51,152
cenario 3: 2015 Min + PV	Home				1			
Measure		Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
Duct Qn 0.08→0.04		\$0	\$250	\$250	30		1.096	\$274
SEER13GF80*		\$3,493	\$3,445	-\$48	15		1.839	-\$89
Capacity (kBtu)		18.0	18.0					
SEER		13.0	13.0					
		56.0 0.80	44.0					
Heating Cap (kBtu)	AFUE		0.80					
Heating Cap (kBtu) AFUE			\$125	\$25	30		1.096	\$27
Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 ac	ch50	\$100					1.839	\$9
Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a Factory Sealed AHU		\$0	\$5	\$5	15			
Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a Factory Sealed AHU Wall cavity: R-21→R-20	0+5	\$0 \$3,657	\$5 \$5,378	\$1,721	50		0.919	\$1,582
Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a Factory Sealed AHU	0+5	\$0	\$5					
Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a Factory Sealed AHU Wall cavity: R-21→R-20	0+5	\$0 \$3,657	\$5 \$5,378	\$1,721	50		0.919	\$1,582
Heating Cap (kBtu) AFUE Envelope: 7 ach50→3 a Factory Sealed AHU Wall cavity: R-21→R-20	0+5	\$0 \$3,657	\$5 \$5,378	\$1,721	50	1.94%	0.919	\$1,582

Fairbanks Homes (Base ucBsmt ADS; Qn=0.08)							
cenario 4: High Efficiency Home							
Measure	Base\$	Improv\$	Incr\$	svc life	Maint	P2	LC Cost
In Duct Qn 0.08→0.01	\$0	\$1,000	\$1,000	30		1.096	\$1,096
SEER13GF94*	\$3,493	\$3,638	\$145	15		1.839	\$266
Capacity (kBtu)	18.0	18.0					
SEER	13.0	13.0					
Heating Cap (kBtu)	56.0	41.0					
AFUE	0.80	0.94					
Lighting: 75%FL→100%FL	\$360	\$540	\$180	5		4.847	\$873
Envelope: 7 ach50 \rightarrow 3 ach50	\$100	\$125	\$25	30		1.096	\$27
Factory Sealed AHU	\$0	\$5	\$5	15		1.839	\$9
Wall cavity: R-21 \rightarrow R-20+5	\$3,657	\$5,378	\$1,721	50		0.919	\$1,582
Windows: 0.35/0.4→0.32/0.4	\$5,900	\$6,409	\$509	30		1.096	\$558
Tnkless gasWH (EF=0.83)	\$600	\$1,000	\$400	15	2.29%	2.342	\$937
eStar refrigerator	\$1,200	\$1,275	\$75	15		1.839	\$138
eStar clothes wash/dry	\$1,200	\$1,350	\$150	15		1.839	\$276
eStar dishwasher	\$450	\$500	\$50	15		1.839	\$92
		Totals	\$4,260				\$5,854

Appendix B Determination of HVAC Equipment Costs

NREL maintains a very useful online National Residential Efficiency Measure Database (<u>http://www.nrel.gov/ap/retrofits/index.cfm</u>) containing estimated retrofit costs for HVAC equipment.

The HVAC cost data are cast in terms of only the equipment capacity as $Cost = a^*CAP$. The database provides the value of 'a' for each listed efficiency. Although it would likely be possible to use the listed efficiencies to develop a formulation cast in terms of both efficiency and capacity (e.g. $Cost = a^*CAP + b^*EFF$), this likely does not adequately characterize costs. Conventional pricing logic implies that fixed and variable costs are associated with HVAC installation. This can be empirically verified by regressing on collected cost data where fixed and variable cost components are clearly revealed. For example, fixed costs are associated with selling the new equipment, dispatching a vehicle and service personnel to the installation site, removing the old equipment, and hooking up the new equipment that are not tied directly to the efficiency or the size of the new equipment. Thus, the characterization of HVAC costs as stemming solely from equipment efficiency and capacity tends to underestimate costs for small capacity equipment (which will incur a larger percentage of fixed costs relative to total cost) and overstate costs.

BA-PIRC attempted to characterize the fixed costs associated with HVAC replacements using an empirical approach. Available online retail costs from available manufacturers were used to determine the, uninstalled retail cost of a variety of HVAC equipment. One clear advantage of this method is that the cost data, unlike those collected from installers are very consistent in their origin with less statistical variation. To these online values were added fixed costs that make up the total price similar to those observed in the NREL database. The resulting total cost data are then regressed in terms of equipment efficiency and capacity for four categories of commonly available HVAC equipment. The four categories are:

- Heat pumps
- Air conditioners (with strip resistance heating)
- Gas furnaces (with no air conditioning)
- Gas furnace-air conditioner combinations

For each equipment category, an 8% tax was applied to the online retail cost plus a fixed "service" cost plus 35% overhead and profit, such that

Total Cost = Retail*1.08 + \$750 + Retail*0.35

The fixed "service" cost is calculated based on 4 man-hours of sales time at \$28.00 per hour and 16 hours of installation time at \$22.50 per hour with a 10% fringe and 30% overhead added to these salary rates. In addition, a daily average truck charge of \$100 is added to this total salary charge to arrive at the fixed service charge.

The resulting total cost estimates are then regressed against the equipment capacity and efficiency from online data sources to arrive at generalized equations that can be used to calculate the HVAC costs used in economic cost effectiveness calculations. The resulting equations are as follows.

Heat Pumps: -5539 + 604*SEER + 699*tons Air Conditioners (with strip heat): -1409 + 292*SEER + 520*tons Gas Furnace/air conditioner: -6067 + 568*SEER + 517*tons + 4.04*kBtu + 1468*AFUE Gas Furnace only: -3936 + 14.95*kBtu + 5865*AFUE

Results from the regressions showing the sample size (n) and correlation coefficient (R^2) for each equipment category are shown in Figure B-1.

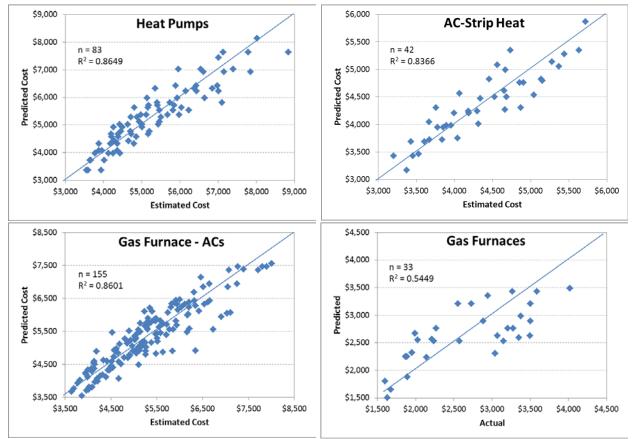


Figure B-1. Results from regression analysis of CostOpt HVAC cost estimates

Considering the variability of the marketplace, the correlation coefficients are reasonable for these regressions. For comparison, Tables B-1 through Table B-3 show the range of costs provided by the NREL database for replacement heat pumps, air conditioners, and gas furnaces.

NREL Heat Pump Replacement Costs					
SEER	Low \$/kBtu	High \$/kBtu	Average \$/kBtu	± %	
13	97	170	140	26%	
14	110	180	140	25%	
15	110	190	150	27%	
16	120	200	160	25%	
17	130	210	170	24%	
18	140	220	180	22%	
19	140	230	180	25%	
20	150	230	190	21%	
21	160	240	200	20%	

Table B-1. NREL Cost Estimates for Heat Pumps

Table B-2. NREL	Cost Estimates for	Air Conditioners
-----------------	--------------------	------------------

NREL Air Conditioner Replacement Costs					
	Low	High	Average		
SEER	\$/kBtu	\$/kBtu	\$/kBtu	± %	
13	59	190	130	50%	
14	66	200	130	52%	
15	73	210	140	49%	
16	80	210	150	43%	
17	87	220	150	44%	
18	94	230	160	43%	
19	100	230	170	38%	
20	110	240	170	38%	
21	110	250	180	39%	

 Table B-3. NREL Cost Estimates for Gas Furnaces

NREL Gas Furnace Replacement Costs						
	Low	High	Average			
AFUE	\$/kBtu	\$/kBtu	\$/kBtu	± %		
78%	8.7	33.3	15	82%		
80%	8.7	35.3	18	74%		
82%	8.7	38.3	21	70%		
90%	14.7	49.3	32	54%		
92%	17.7	52.3	35	49%		
94%	20.7	55.3	38	46%		
96%	23.7	58.3	41	42%		

These estimates indicate significant variations in the marketplace with respect to HVAC costs and to a certain degree mirror the variations in costs represented in Figure B-1, with gas furnaces showing the largest variance.

BA-PIRC evaluated the economic cost effectiveness estimates against those provided by the NREL database average cost estimates for heat pumps and gas furnaces. Figure B-2 presents the results of this comparison.

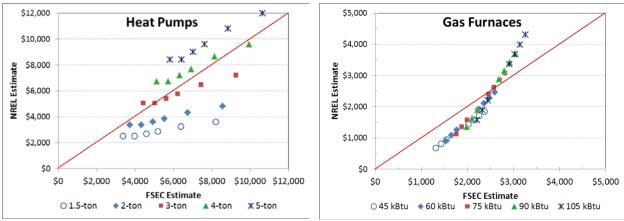


Figure B-2. Comparison of BA-PIRC HVAC cost estimates and NREL HVAC cost estimates

In Figure B-2 the individual plot points represent different efficiencies, with SEERs of 13, 14, 15, 16, 18, and 21 represented on the heat pump chart. The right-hand panel shows data for furnaces: with representative AFUEs of 78%, 80%, 82%, 90%, 92%, 94%, and 96%. Each chart also distinguishes between different capacities, with 1.5-, 2-, 3-, 4-, and 5-ton equipment on the heat pump chart and 45, 60, 75, 90, and 105 kBtu/h equipment on the gas furnace chart.

Both charts show that the BA-PIRC estimates are larger for the lower capacity and smaller for the larger capacity equipment. The charts also show that, on average, the BA-PIRC estimates are consistent with the NREL estimates. However, the fact that the BA-PIRC estimates treat fixed costs more explicitly is evident on both charts. In a practical sense, the BA-PIRC estimates generally show that monetary savings in the capacity of installed equipment coming from more efficient envelope measures are slightly less important than the original values in the NREL database.

Appendix C Economic Cost Effectiveness

If analyses are conducted to evaluate energy saving improvements to the home, indicators of economic cost effectiveness shall use present value life-cycle costs and benefits, which shall be calculated as follows:

LCC _E = P1 * (1 st Year Energy Costs)	Eq. [1]
LCC _I = P2 * (1 st Cost of Improvements)	Eq. [2]
where: $LCC_E = Present Value Life-Cycle Cost of Energy$ $LCC_I = Present Value Life-Cycle Cost of Improvements$ P1 = Ratio of Life-Cycle energy costs to the 1st year energy costs P2 = Ratio of Life-Cycle Improvement costs to the first cost of improvements	
Present value life-cycle energy cost savings shall be calculated as follows:	
$ LCC_{S} = LCC_{E,b} - LCC_{E,i} $ where: $ LCC_{S} = Present Value Life Cycle Energy Cost Savings $ $ LCC_{E,b} = Present Value LCC of energy for baseline home configuration $ $ LCC_{E,i} = Present Value LCC of energy for improved home configuration $	Eq. [3]
Standard economic cost effectiveness indicators shall be calculated as follows:	
$SIR = LCC_S / LCC_I$	Eq. [4]
NPV = LCCs - LCCI where: SIR = Present Value Savings to Investment Ratio NPV = Net Present Value of Improvements	Eq. [5]
Calculation of P1 and P2. The ratios represented by P1 and P2 shall be calculated is accordance with the following methodology ⁹ :	n
$P1 = 1 / (DR - ER) * (1 - ((1 + ER) / (1 + DR))^{nAP})$	Eq. [6a]
or if $DR = ER$ then	
P1 = nAP / (1+DR) where: P1 = Ratio of Present Value Life Cycle Energy Costs to the 1 st year Energy Costs DR = Discount Rate ER = Energy Inflation Rate nAP = number of years in Analysis Period	Eq. [6b] s
$P2 = DnPmt + P2_A - P2_B + P2_C + P2_D - P2_E + P2_F$ where:	Eq. [7]

⁹ Duffie, J.A. and W.A. Beckman, 1980. *Solar Engineering of Thermal Processes*, pp. 398-406, John Wylie & Sons, Inc., New York, NY.

P2 = Ratio of Life Cycle Improvement costs to the first cost of improvements

DnPmt = Mortgage down payment rate

 $P2_A = Mortgage cost parameter$

 $P2_B = Income Tax cost parameter$

 $P2_C$ = Operation & Maintenance cost parameter

 $P2_D = Property tax cost parameter$

 $P2_E = Salvage value cost parameter$

 $P2_F$ = Replacement cost parameter

$P2_A = (1 - DnPmt) * (PWFd / PWFi)$

where:

PWFd = Present Worth Factor for the discount rate = $1/DR*(1-(1/(1+DR)^nAP))$

PWFi = Present Worth Factor for the mortgage rate = $1/MR*(1-(1/(1+MR)^nMP))$

DR = Discount Rate

MR = Mortgage interest Rate

nAP = number of years of the Analysis Period

nMP = number of years of the Mortgage Period

$P2_{B} = (1 - DnPmt) * iTR * (PWdiff * (MR - 1 / PWFi) + PWFd / PWFi)$ Eq. [8b]

where:

iTR = effective income Tax Rate

PWdiff = ratio of the present worth discount rate to present worth mortgage rate

 $= 1 / (DR - MR) * (1 - (((1 + MR) / (1 + DR))^n MP))$

or if DR = MR then = nMP/(1+MR)

P2c = MFrac*PWinf

where:

MFrac = annual O&M costs as a fraction of first cost of improvements

 $PWinf = ratio of present worth discount rate to present worth general inflation rate = 1/(DR-GR)*(1-(((1+GR)/(1+DR))^nAP))$

or if DR = GR then = nAP/(1+DR)GR = General Inflation Rate

P2_D = pTR*AssessRatio*PWinf

where:

pTR = effective property Tax Rate

AssessRatio = Fraction of assessed property value against which pTR is applied (typically 0.80)

$$P2_E = RLF / ((1 + DR)^nAP)$$

where:

RLF = Remaining Life Fraction following the end of the analysis period and

RLF = (nAP/Life) - (Integer (nAP/Life))

Eq. [8a]

Eq. [8c]

Eq. [8d]

or if Life > nAP RLF = (Life-nAP) / nAP <u>where:</u> Life = useful service life of the improvement(s)

$P2_F = Sum \{1 / ((1 + (DR - GR))^{(Life*i)})\}$ for i=1, nEq. [8f] $\underline{where:}$ $\underline{i = the i^{th} replacement of the improvement}$ Life = the expected service life of the improvement

Determination of Economic Parameters. Economic parameter values used in the cost effectiveness calculations shall be determined as follows:

General Inflation Rate (GR) shall be the greater of the 5-year and the 10-year Annual Compound Rate (ACR) of change in the Consumer Price Index for Urban Dwellers (CPI-U) as reported by the U.S. Bureau of Labor Statistics, where ACR shall be calculated in accordance with equation [9].

ACR = ((endVal)/(startVal))^(1.0/((endYr)-(startYr)))-1.0	Eq. [9]
where:	
ACR = Annual Compound Rate of change	
endVal = Value of parameter at end of period	
startVal = Value of parameter at start of period	

endYr = Year number at end of period

startYr = Year number at start of period

Discount Rate (**DR**) shall be equal to the General Inflation Rate plus 2%.

Mortgage Interest Rate (MR) shall be the greater of the 5-year and the 10-year average of simple interest rate for fixed rate, 30-year mortgages computed from the Primary Mortgage Market Survey (PMMS) as reported by Freddie Mac.

Down Payment Rate (DnPmt) shall be 10% of 1st cost of improvements.

Energy Inflation Rate (ER) shall be the greater of the 5-year and the 10-year Annual Compound Rate (ACR) of change in the Bureau of Labor Statistics, Table 3A, Housing, Fuels and Utilities, Household Energy Index¹⁰ as calculated using Equation [9].

Mortgage Period (**nMP**) shall be defaulted to 30 years unless a mortgage finance period is specified by a program or mortgage lender, in which case the specified mortgage period shall be used. The mortgage period used in the cost effectiveness calculation shall be disclosed in reporting results.

¹⁰ Table 3A from detailed reports listed at <u>http://www.bls.gov/cpi/cpi_dr.htm</u>